

STEVE.

* INCL. PART NOS
ON ASSEMBLY DIAGRAM




HP AT 158

HP AT 145

Owner / Service Manual

Revised 11/11/91

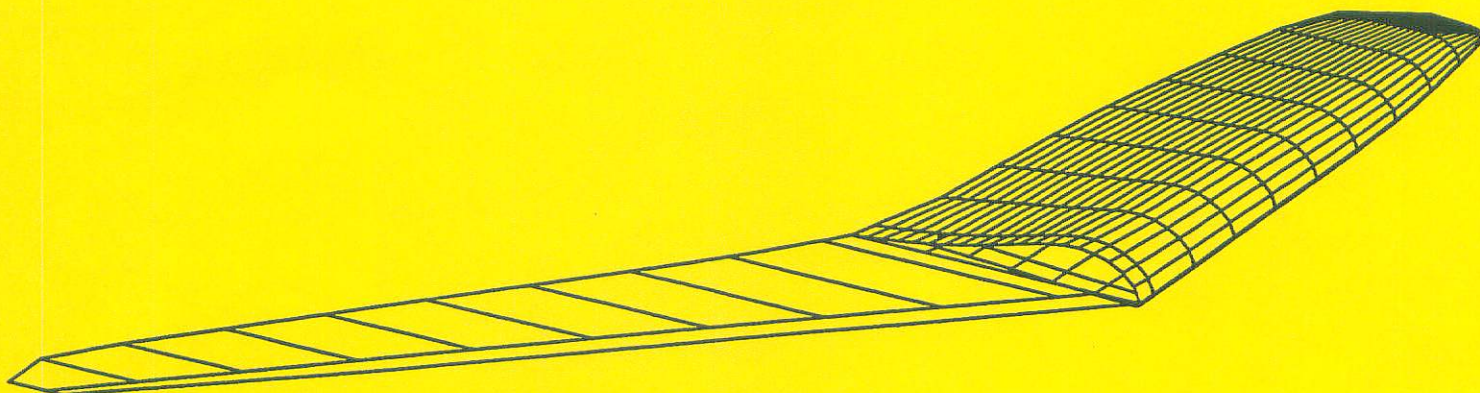

500 West Blueridge Orange CA USA 92665-4206 FAX (714) 998-0647 Phone (714) 998-6359



HP AT 158

HP AT 145

Owner / Service Manual

Revised 11/11/91

Copyright © 1991 by Sport Kites, Inc. dba Wills Wing, Inc. All rights reserved. No part of this manual may be reproduced in any form without the express written permission of Sport Kites, Inc., dba Wills Wing, Inc.

Wills Wing, Inc. 1208 H. East Walnut Santa Ana, CA 92701 Phone (714) 547- 1344

Table Of Contents

	Page
Introduction	3
Disclaimer and Warning	4
Technical Information and Placarded Operating Limitations	5 - 6
Shipping Breakdown and Re-Assembly	7 - 9
Glider Set-Up and Preflight	10 - 26
Launching and Flying	27 - 31
Trimming The Glider In Pitch	32 - 33
Using The VG System	33 - 34
Landing	34 - 36
Breakdown	37 - 41
Stability Systems	42 - 43
Maintenance	43 - 44
Removing and Re-Installing The Sail	45 - 47
Tuning	48 - 49
Car Top Mounting and Closing Message	50
Compliance Verification Specification Sheets	51 - 52
Frame Plans and Exploded Views	53ff

INTRODUCTION

Thank you for purchasing a Wills Wing glider, and welcome to the world wide family of Wills Wing pilots. We are a company of pilots and aviation enthusiasts, and our goal is to serve your flying needs now and in the future, as we have done for pilots throughout the world since 1973.

We encourage you to read this manual thoroughly for information on the proper use and maintenance of your Wills Wing glider. If at any time you have questions about your glider, or about any aspect of hang gliding that your Wills Wing dealer cannot answer, please feel free to give us a call.

We wish you a safe and enjoyable flying career, and, once again, welcome aboard!

*Rob Kells, Mike Meier, Linda Meier, and Steve Pearson
Wills Wing, Inc.*

DISCLAIMER AND WARNING

Hang gliding is a form of aviation. Like any form of aviation, its safe practice demands the consistent exercise of pilot skill, knowledge of airmanship and weather, judgement and attention at a level which is appropriate to the demands of each individual situation. Pilots who do not possess or exercise the required knowledge, skills and judgement are frequently injured and killed. The statistical rate at which fatalities occur in hang gliding is approximately one per thousand participants per year.

The Federal Aviation Administration does not require a pilot's license to operate a hang glider. Hang gliders and hang gliding equipment are not designed, manufactured, tested or certified to any state or federal government airworthiness standards or requirements. Wills Wing hang gliding products are not covered by product liability insurance. You should never attempt to fly a hang glider without having received competent instruction. We recommend that you not participate in hang gliding unless you recognize and wish to personally assume the associated risks.

Please fly safely.

Wills Wing, Inc.

TECHNICAL INFORMATION AND PLACARDED OPERATING LIMITATIONS

The HP AT 158 and HP AT 145 have been tested and found to comply with the 1989 and 1991 HGMA Airworthiness Standards. These standards require:

- 1) A positive load test at root stall angle of attack at a speed of at least 65 mph for at least three seconds without failure.
- 2) A negative 30 degree angle of attack load test at a speed of at least 46 mph for at least 3 seconds without failure.
- 3) A negative 150 degree angle of attack load test at a speed of at least 32 mph for at least 3 seconds without failure.
- 4) Pitch tests at speeds of 20 mph, 30 mph and 40 mph which show the glider to be stable over a range of angles of attack from trim to negative 20 degrees at 20 mph and from trim to negative 10 degrees at 30 mph and from trim to zero lift angle of attack at 40 mph.
- 5) Flight maneuvers which show the glider to be adequately stable and controllable throughout the normal range of operation.

NOTE: The HP AT 158 and HP AT 145 have been designed for footlaunched soaring flight. They have not been designed to be motorized, tethered, or towed. They have been towed successfully using the ATOL truck towing system, and are approved for towing in this manner **provided that all specific ATOL procedures and safeguards are followed.** It is the pilot's obligation to contact ATOL directly for all recommended procedures for using the ATOL tow system.

In particular, please note the diagrams below showing the correct and incorrect way to attach a nose line for ATOL towing. Attaching the line incorrectly may result in the bottom front wires becoming disconnected during release from the tow vehicle resulting in loss of control of the glider. (Figure 1, 2) A positive safety lock mechanism for the nose keyhole tang was incorporated on all gliders assembled after October 1991. Pilots who tow are advised to retrofit their gliders with this mechanism, if not so equipped.

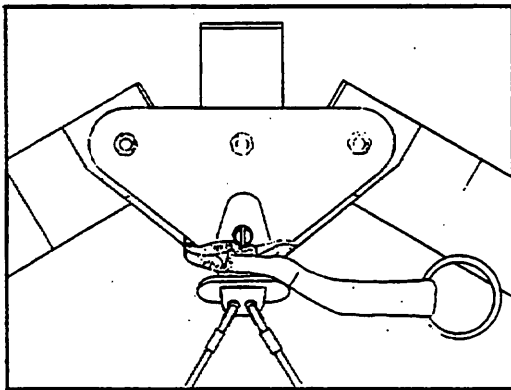


Figure 1 CORRECT

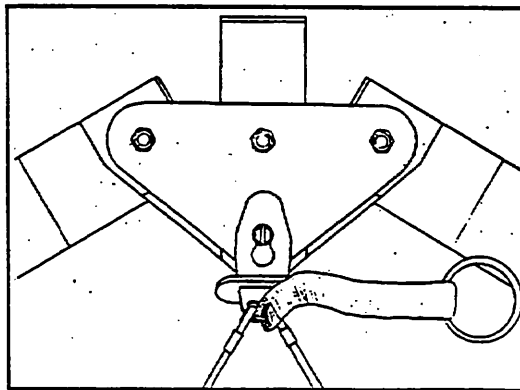


Figure 2 WRONG - UNSAFE!

VIEW FROM BELOW THE NOSEPLATE

Flight operation of the HP AT should be limited to non aerobatic maneuvers; those in which the pitch angle will not exceed 30 degrees nose up or nose down from the horizon, and the bank angle will not exceed 60 degrees. The HP AT will resist spinning, and will recover from a spin once control pressures are relaxed. As the nose lowers and the angle of attack is reduced, the stall will be broken and the spin will stop. No attempt should ever be made to deliberately spin the glider, as loss of control, in flight inversion, and structural failure may result.

The maximum steady state speed for a prone pilot in the middle of the recommended weight range full forward on the control bar is approximately 50 mph for the HP AT 158, and approximately 55 mph for the HP AT 145. These are the respective VNE's (speed never to exceed) for each model. In rough air, or when abrupt maneuvering is anticipated, the HP AT 158 should not be flown faster than 46 mph, and the HP AT 145 should not be flown faster than 50 mph. The stability, controllability, and structural strength of a properly maintained HP AT have been determined to be adequate for safe operation when the glider is operated within all of the manufacturer specified limitations. No warranty of adequate stability, controllability, or structural strength is made or implied for operation outside of these limitations.

The stall speed of the HP AT at maximum recommended wing loading is 25 mph or less. The top (steady state) speed at minimum recommended wing loading for a prone pilot with a properly designed and adjusted harness is at least 46 mph.

All speeds given above are indicated airspeeds, for a properly calibrated airspeed indicator mounted in the vicinity of the pilot. It is strongly recommended that the pilot fly with such an airspeed indicator at least as many times as is necessary to become acquainted with what control bar positions and what kinesthetic sensory stimuli correspond to the various placarded limiting airspeeds.

The recommended hook in pilot weight range for the HP AT's are:

HP AT 158: 150 - 250 lbs.

HP AT 145: 135 - 235 lbs.

A minimum USHGA Advanced (IV) level of pilot proficiency is required to fly the HP AT safely. Operation of the glider by unqualified pilots may be dangerous.

Operating the HP outside of the above limitations may result in injury and death. Flying the HP AT in the presence of strong or gusty winds, or turbulence may result in loss of control of the glider which may lead to injury and death. Do not fly in such conditions unless you realize and wish to personally assume the associated risks. Wills Wing is well aware that pilots have, and continue to perform maneuvers and fly in conditions which are outside the recommended operating limitations stated herein. Please be aware that the fact that some pilots have exceeded these limitations in the past without dangerous incident does not imply or insure that the limitations may be exceeded without risk. We know for a fact that a pilot in the lower 1/3 of the weight range of the HP AT 158 can attain a high enough speed on the glider to cause a positive load structural failure of the glider by executing a rapid pull-up. We do not know, and cannot know, the full range of maneuvers or conditions which may cause the pilot's safety to be compromised, nor can we test the glider in all possible circumstances.

HP AT BREAKDOWN PROCEDURE FOR SHIPPING AND RE-ASSEMBLY PROCEDURE

The HP AT 158 can be broken down to approximately 13.5 feet by removal of the rear leading edges. The HP AT 145 can be broken down to approximately 12.8 feet.

DO NOT REMOVE THE CLEVIS PIN WHICH IS LOCATED 5.5" FROM THE REAR OF THE 60 MM FRONT LEADING EDGE.

1) The front leading edge of the HP AT is 60 mm (2.36") tubing, into which slides the rear leading edge of 50 mm (1.97") tubing, with an overlap of 6". Because of the great difference in diameters of the front and rear leading edges, they are not concentric; that is they do not share a common axial centerline. Instead, the 50 mm and the 60 mm tubes are tangential (they contact each other) on a line along the forward edge of the leading edge, just below the horizontal centerline. (See diagram).

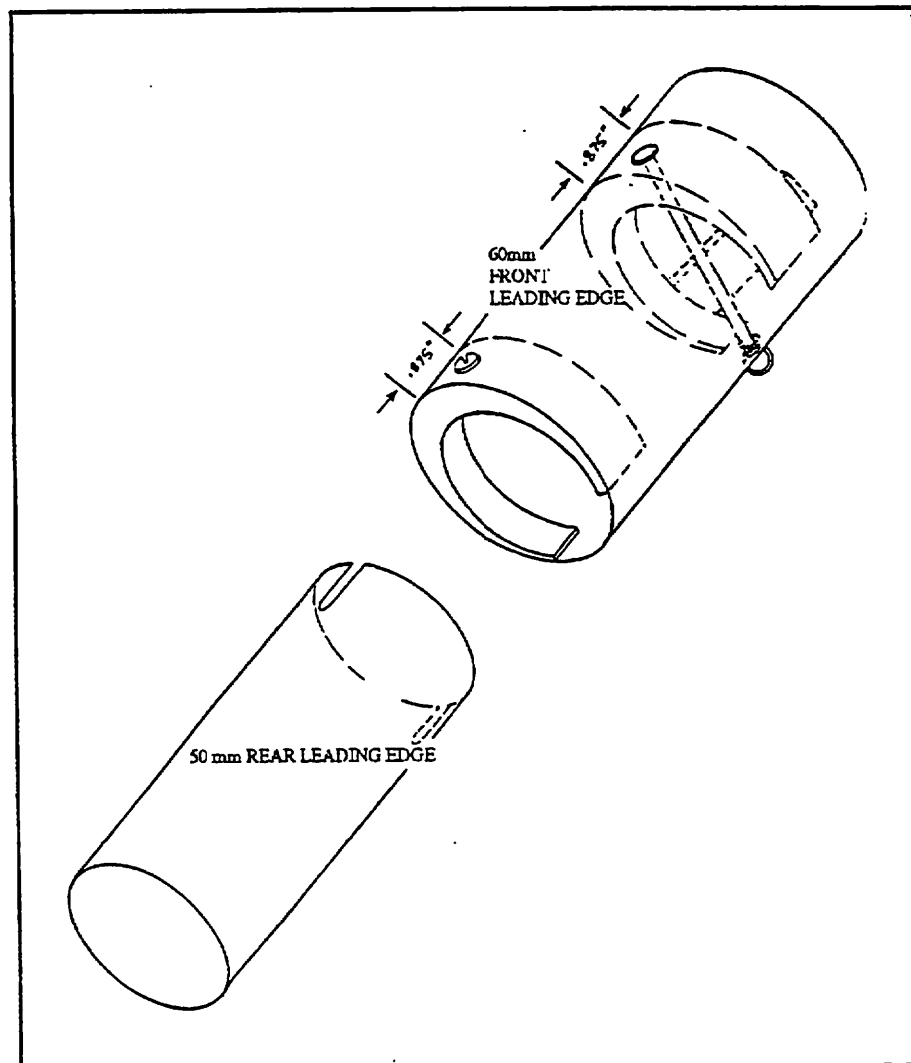


Figure 3

Inside the 60 mm front leading edge, six inches from the rear end, is a 58 mm diameter ryton plastic crescent reducer which is secured in place by a 3/16" clevis pin which passes all the way through the 60 mm front leading edge. (See diagram). DO NOT REMOVE THIS PIN.

A second crescent is located at the aft end of the 60 mm front leading edge, where the 50 mm rear leading edge exits. This crescent is held in place with a screw. DO NOT REMOVE THIS SCREW EITHER.

The rear leading edge is slotted at it's forward end, such that the slots engage around the clevis pin which secures the forward crescent.

TO BREAK DOWN THE LEADING EDGES FOLLOW THESE STEPS:

1) Lay the glider on the ground or floor, unzip and remove the bag and remove the velcro ties. Undo the velcros which hold the sail around the sail mount plug and pull the sail rearward at each tip to dismount the sail from the rear leading edge.

2) Obtain an indelible marker. Mark the rear leading edges left and right (remember that left and right are reversed if the glider is lying "on it's back", upside down. Push the sail up to where you have uncovered the point where the rear leading edge exits the front. Trace around the circumference of the 50 mm rear leading edge just along the aft face of the crescent reducer so as to mark the point at which the rear leading edge is fully engaged in the front.

3) Scribe a line along the leading edge which crosses the front to rear leading edge junction at the point on the circumference where the front and rear leading edges are tangent. This will help to align the rear leading edge during re-assembly.

4) If the mylar is to be removed from the mylar pocket, do so at this time. At the tip, inside the sail under the mylar pocket, make a small hole and tie or securely tape a 25' long piece of leech line to the mylar. Remove the top plastic kingpost cap and disconnect the top side wire from the kingpost. Replace the cap. Pull the top side wire through to the inside of the sail. Pull the sail back down the length of the leading edge but do not remount it to the rear. Pull the mylar out from the nose of the glider, curling it under where it exits the front of the mylar pocket to that it will fit through the opening. If the mylar sticks, work up and down the edges of the mylar along the mylar pocket, breaking the edges of the mylar away from the seamstick tape in the seams.

5) Spray silicone spray lubricant on the rear leading edge at the point where it exits from the front.

6) Pull the rear leading edge straight aft to disengage it from the front. Put tape on the sharp edges of the front end of the rear leading edge tubes.

7) Carefully fold the rear of the sail over against the front, and replace the bag on the glider.

RE-MOUNTING THE REAR LEADING EDGES

1) Make sure you are mounting the correct leading edge rear into the correct front (check the "right" / "left" designation).

2) Spray the forward six inches of the rear leading edge with silicone spray lubricant.

3) Slide the rear leading edge into the front, lining up the rotational alignment marks you made during breakdown, until the rear engages fully in the front leading edge, as indicated by the circumferential scribe made at the exit point of the rear leading edge during breakdown.

4) Pull the sail down the leading edge and re-install the mylar if removed. **CAUTION: IF YOU USED TAPE TO PULL THE STRING INTO THE MYLAR POCKET, YOU WILL HAVE TO PUNCH A HOLE IN THE MYLAR AND TIE THE STRING TO THE MYLAR TO RE-INSTALL IT. OTHERWISE THE STRING WILL PROBABLY COME DETACHED FROM THE MYLAR.**

5) Re-install the top side wire if removed.

6) Remount the sail to the rear leading edge, making sure to align the inner sail mount webbing squarely in the slot and attach the securing velcros.

You may find it helpful to use a large, flat bladed screw driver to pry the sail mount webbing over the end of the leading edge tube and into the slot. Take care not to damage the webbing.

HP AT SET UP PROCEDURE

1) With the glider in the bag, lay the glider on the ground, zipper up with the nose into the wind. (Figure 4)

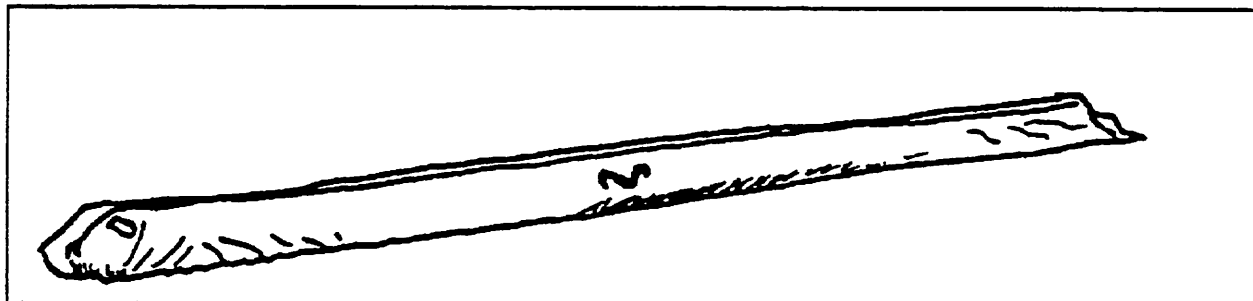


Figure 4

2) Undo the zipper, remove the battens and the control bar cover bag. (Figure 5 & 6)

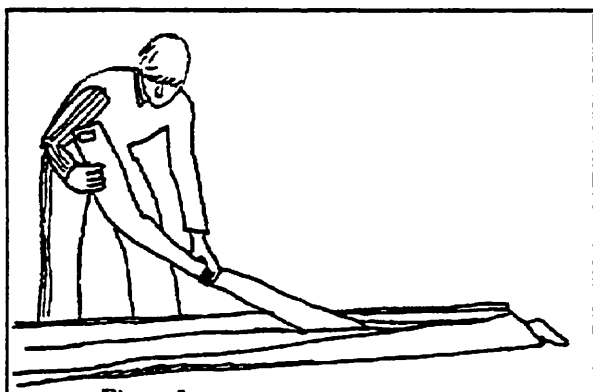


Figure 5

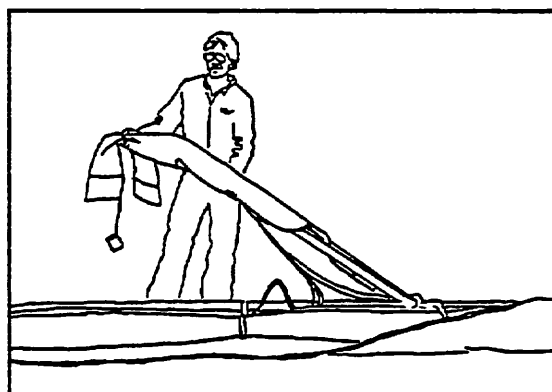


Figure 6

3) Lift the control bar and attach the basetube to the upright, using the bolt, wingnut and safety provided. (Figure 7 & 8) **Make sure that the aluminum fitting is fully inserted into the basetube, and that the bolt is through both the basetube and the fitting. If the hole in the fitting can be seen outside the end of the basetube, the fitting is not fully installed, and will likely disengage in flight resulting in a dangerous structural collapse and loss of control of the glider.**

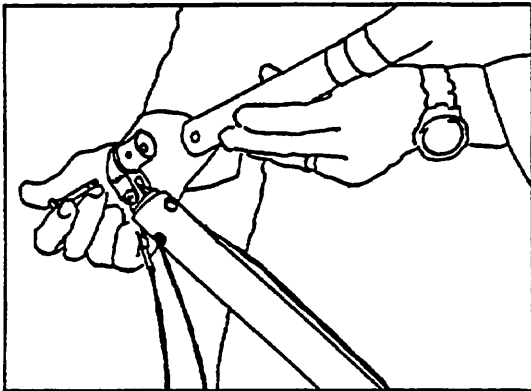


Figure 7

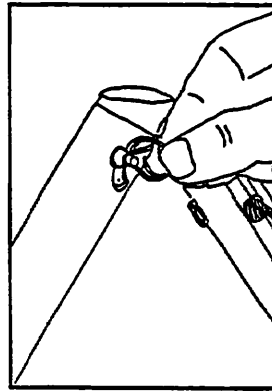


Figure 8

4) Flip the glider upright on the control bar, and remove the bag and all velcro ties. (Figure 9) *Do not remove the leading edge tip protector bags at this time. Do loosen the velcro on the tip protector bags as much as possible without detaching it.*

If there is more than ten mph of wind, turn the glider 90 degrees to the wind.

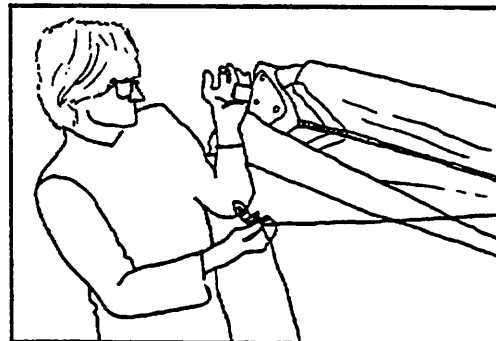


Figure 9

5) Spread the wings almost all the way. Lift the kingpost, remove the top and bottom kingpost protectors entirely, (Figure 10) and set the kingpost on the kingpost base ridge on the keel, *making sure the CG locating pin engages in one of the slots in the track.* (Figure 11) **MAKE SURE YOU SET THE KINGPOST IN THE PROPER SLOT SO THAT YOUR CG IS THE DESIRED POSITION.** (Figure 12, 13) (You may see only one slot, if the other slot was taped over at the factory, following the factory test flight.) Usually, the correct trim will be obtained with the CG set in one of the two middle adjustments of the four positions available. (See the diagram for an illustration of the four available positions.) If the pin is in the forward of the two holes in the kingpost base, then placing the pin in the forward of the two slots on top of the keel will give the *forward middle* CG adjustment. If the pin is in the aft hole in the base, placing the pin in the aft slot will give the *aft middle* CG adjustment. The forward hole in the base in combination with the aft slot on the keel gives the full aft CG adjustment, and the aft hole / forward slot gives the full forward CG adjustment.

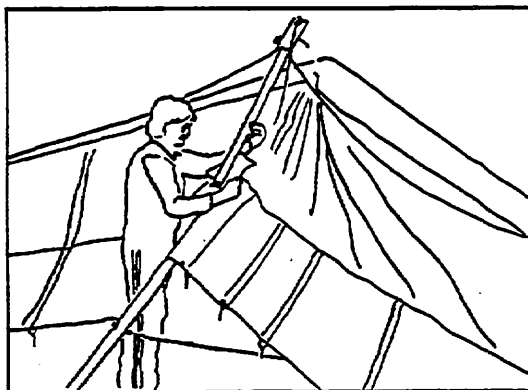


Figure 10

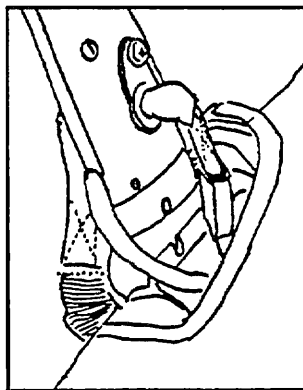


Figure 11

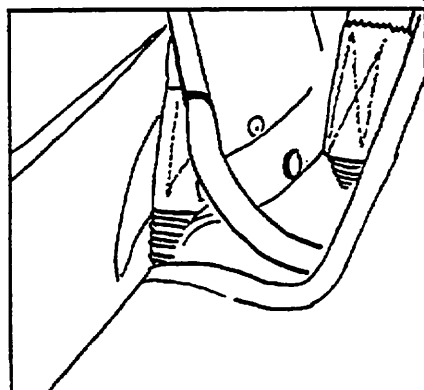


Figure 12

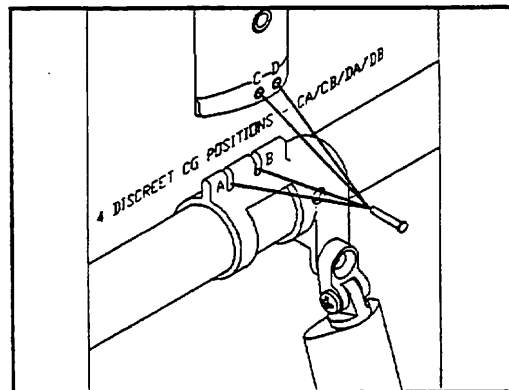


Figure 13

6) Attach the bridle ring to the bridle snap clip, making sure that the bridle cables are not twisted, and that the bridles are inside the top rear wire. (Figure 14, 15, 16)

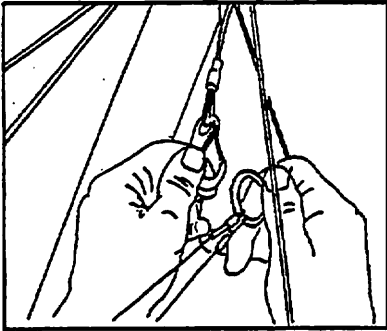


Figure 14

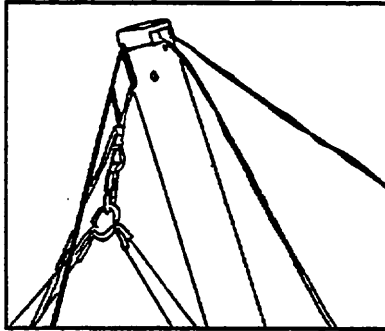


Figure 15

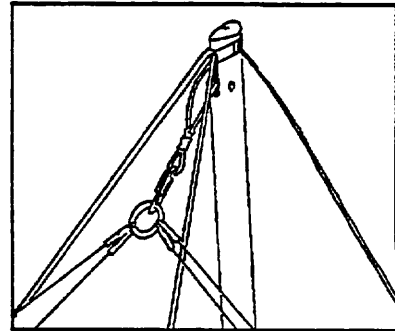


Figure 16 WRONG !

7) Attach the top rear wire to the rear keel bolt, making sure again that the bridle cables are inside the wire, and attach the rubber safety. (Figure 17)

Check each pair of the curved top surface battens for side to side symmetry. (Figure 18)

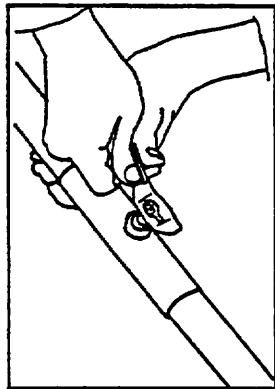


Figure 17

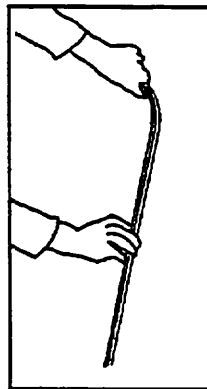


Figure 18

8) Install the cambered top surface battens in the sail, leaving out the shortest three on each side for the present time. Each batten is secured by a double loop of the batten string. (Figure 19, 20) Note: Insert the cambered battens carefully, so as to prolong the life of your batten pockets. Never insert or remove battens with the crossbar tensioned, or with a heavy wind load on the sail, or in any condition that causes the battens to slide with great resistance in the pockets.

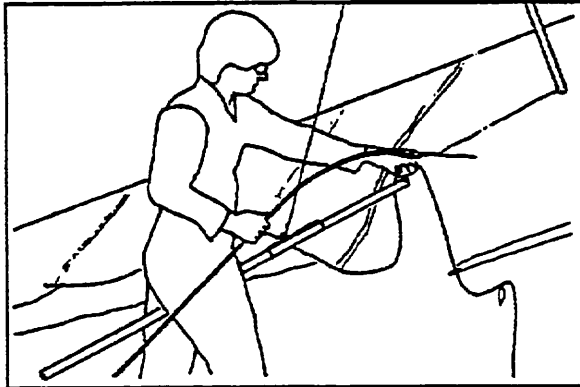


Figure 19

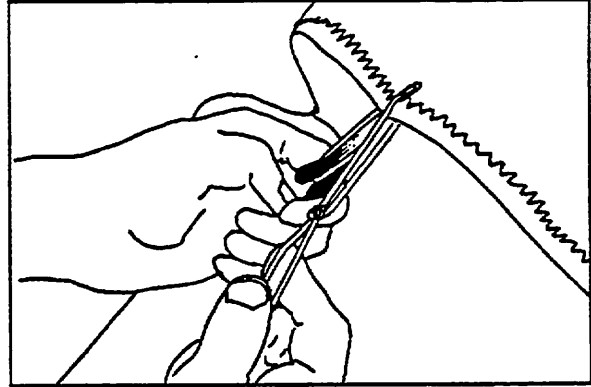


Figure 20

9) Spread the wings all the way and check all cables for any twisted thimbles or tangled cables. Make sure that the right side bottom side wire is not caught on the VG activation lever. (Figure 21, 22)

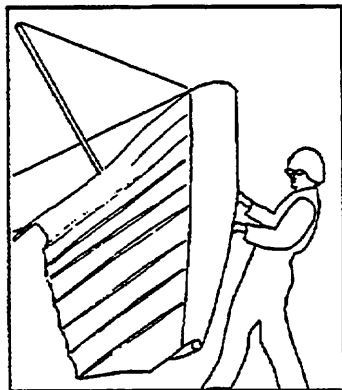


Figure 21

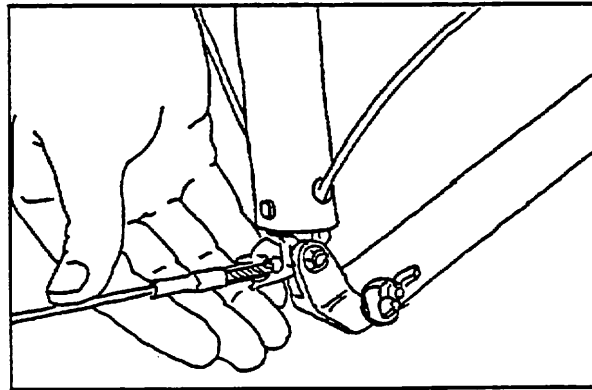


Figure 22

10) Standing under the glider just in front of and facing the control bar, remove each side of the apex protector pad from the control bar apex and stow it inside the double surface. (Figure 23)

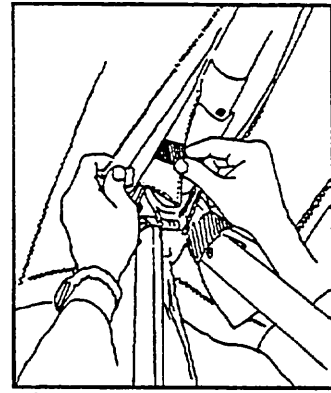


Figure 23

11) The next step is to pull the xbar center back in order to connect the VG activation/bridle compensator cable and the xbar anchor safety cables. The crossbar must be pulled back far enough so that the xbar center tang will overlap the VG activation cable tang. Because the bridles are connected and the weight of the sail is on the bridles, the VG activation cable will be at this point pulled all the way aft until the nico on the compensator cable is bottomed against the front of the PVC block on top of the keel.

At this point there are two alternate methods for pulling back the crossbar; by hand or using your foot.

a) If the perlon line is already threaded around the horizontal apex bolt, back through the xbar wire pullback cable thimble, and tied in a large loop, the glider is set up to be tensioned using your foot. In this case, merely step into the loop in the perlon line, and step down and back to pull back the crossbar. (If the glider is not configured this way, it is easy to convert it to this configuration. Just make sure that the loop is tied far enough down in the perlon that the crossbar center is free to fold all the way forward during breakdown).

b) To pull the crossbar back by hand, first thread the perlon line attached to the xbar wire around the horizontal bolt in the center of the control bar apex, and then back through the thimble on the crossbar pull back wire and pull back on the perlon to pull the crossbar back. When you have the crossbar back far enough to attach the VG activation cable, wrap the perlon line around the top of the downtube and temporarily tie it off.

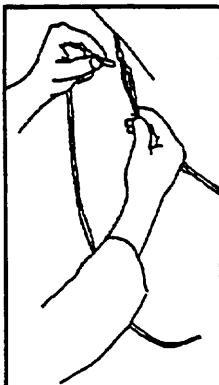


Figure 24

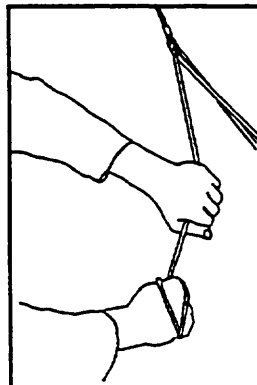


Figure 25

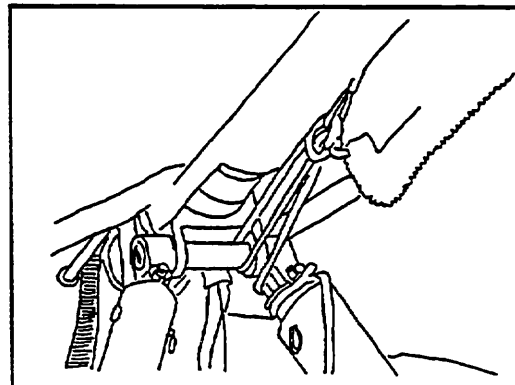


Figure 26

12) Pivot the crossbar center tang to one side to make access easier, and attach the VG activation cable to the crossbar center tang using the ball lock pin provided. (Figure 27)

It may help in inserting the pin to wiggle the tang back and forth while pressing upwards on the pin. *Immediately after installing the pin* untie the perlon line holding the crossbar back, and check the VG activation cable for proper connection and alignment.

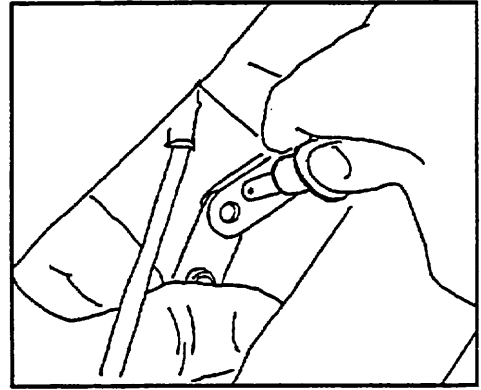


Figure 27

13) Next, install the crossbar sweep wire restraint bolt through the keel, attach the thimble for the sweep wire on the other side, and secure it with the wingnut and safety provided. (Figure 28, 29)

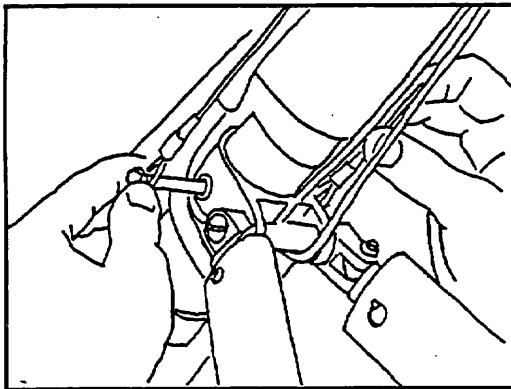


Figure 28

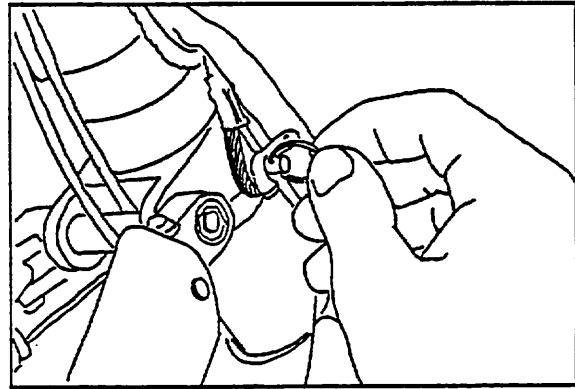


Figure 29

14) **NOTE:** At this time make sure that both the large diameter flex cable housing on the VG activation cable and the small diameter flex cable housing on the VG compensation cable are fully seated in the PVC plastic guide block mounted to the top of the keel.

At this point there should be slight slack in the xbar anchor sweep wires, the VG handle should be up against the downtube and the VG activation cable should be tight.

15) Set the hang loop spreader bar even with or just below the top edge of the streamlined downtube. (Figure 30)

16) Attach the bottom front wires to the bottom of the nose, by pulling down on the nose of the glider while pressing the tang upwards over the shouldered bolt. (Remember, it is the pulling down of the glider's nose rather than the upward pressure on the tang that allows you to install the tang over the bolt. If you have difficulty with installing the tang, and no wires are twisted or thimbles cocked, it is probably because the glider is not sitting on level ground.) (Figure 31)

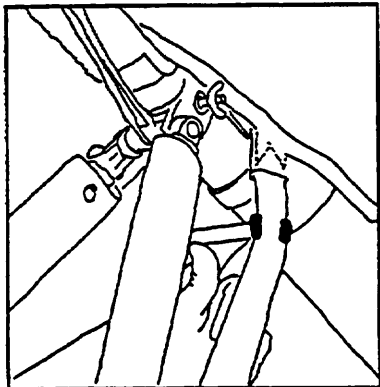


Figure 30

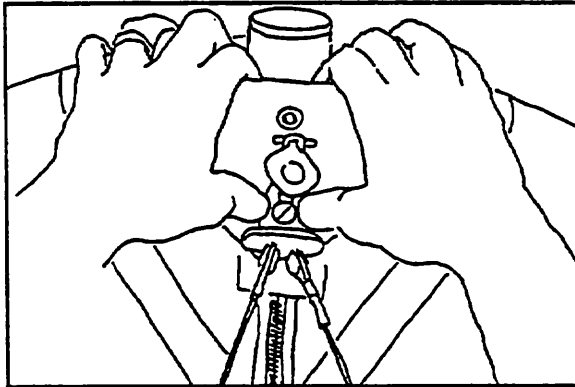


Figure 31

If your glider is equipped with the aluminum keyhole tang lock, follow the directions below:

1) In order to install or remove the keyhole nose tang, the anchor must be rotated into the position shown in figure 32. This will allow the keyhole tang to be in a position far enough forward to slide onto or disengage from the collared bolt. With the anchor in this position, use normal procedures to engage or disengage the keyhole tang.

2) After the tang is installed, slid back and fully engaged on the collared bolt, rotate the anchor to the position shown in figure 33 to secure the tang. With the anchor in this position, the tang cannot move forward sufficiently to disengage from the bolt.

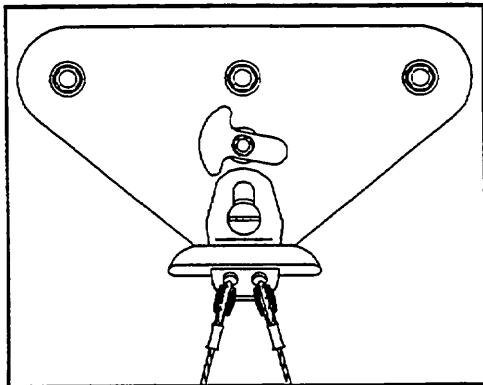


Figure 32

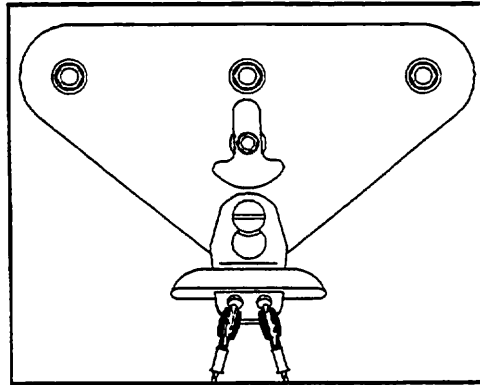


Figure 33

17) Push the nose batten all the way back into the sail, lifting the tip over the top of the keel until it is seated on top of the keel. (Figure 34)

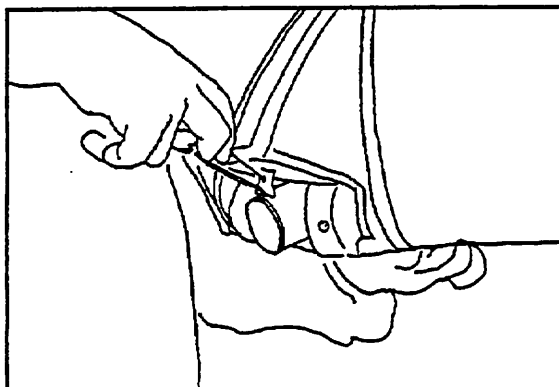


Figure 34

18) Remove the wingtip protector bags, and remove the plastic wingtip fairings from inside the bags. (Figure 35) Install the last three curved battens on each side.

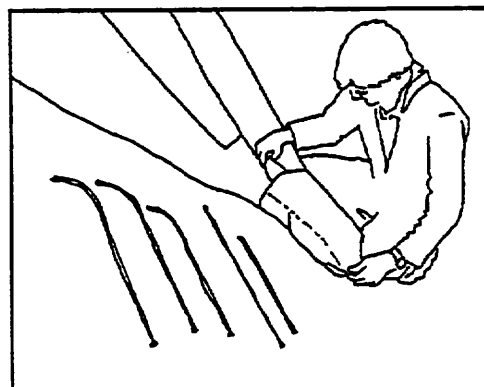


Figure 35

Note: Instruction 19 and figure 36 apply only to pre-1991 HP AT's. 1991 and later model HP AT's do not have washout tips.

19) Install the washout tips. To help achieve the proper engagement of the button spring in the plastic washout tip receptacle, insert the washout tip into the receptacle with the button pointing toward the rear end of the leading edge. A slight rotation in either direction after insertion of the washout tip will cause the button to click into place. (Figure 36)

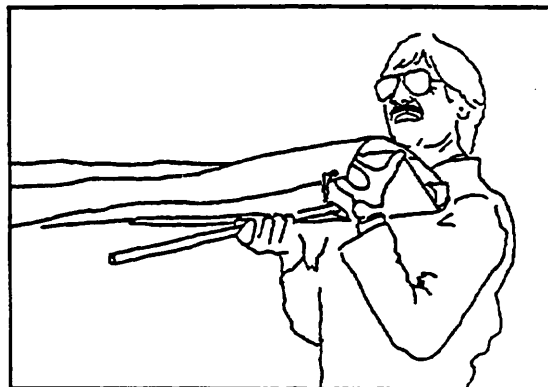


Figure 36

20) Install the plug-in #1 battens. (Figure 37, 38)

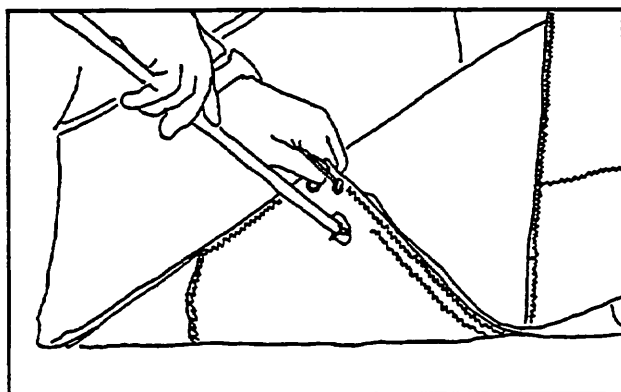


Figure 37

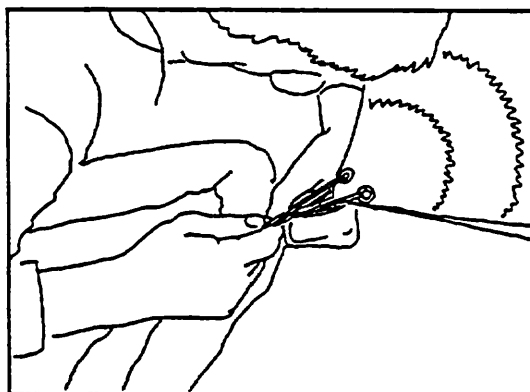


Figure 38

21) At this time preflight the sail mount webbing, making sure that it is fully engaged and square in the slot in the sail mount plug endcap. (Figure 39)

Also, at this time look up into the wing and preflight the #1 batten connection, the front to rear leading edge junction, and the crossbar leading edge junction, checking that all safety rings are installed, etc. (Figure 40)

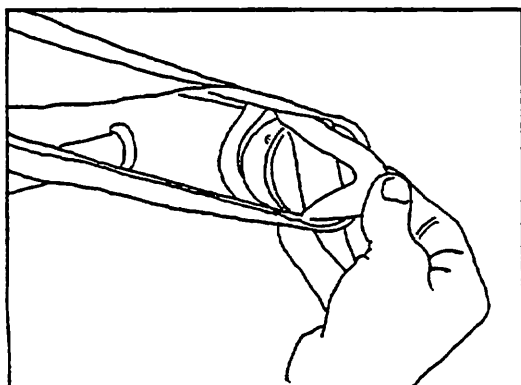


Figure 39

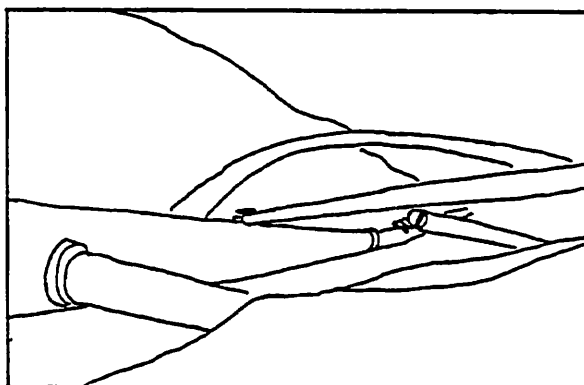


Figure 40

22) Install the plastic wing tip covers using the following procedure:

a) Hold the wingtip fairing in one hand, slightly squeezing the fairing together.)b Lift the rear tip of the #1 batten until the sail at the tip is equally tensioned on both the top and bottom surfaces.

c) Slide the tip fairing into the end of the sail and press the mating velcro surfaces securely together. (Figure 41, 42)

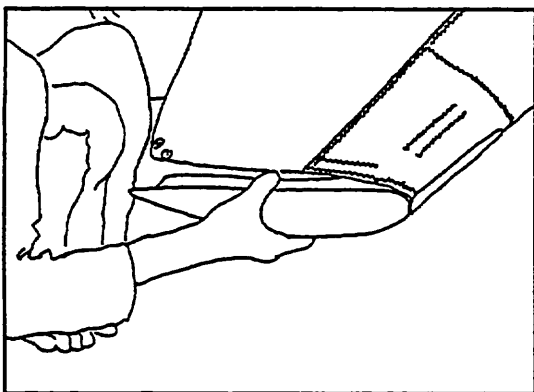


Figure 41

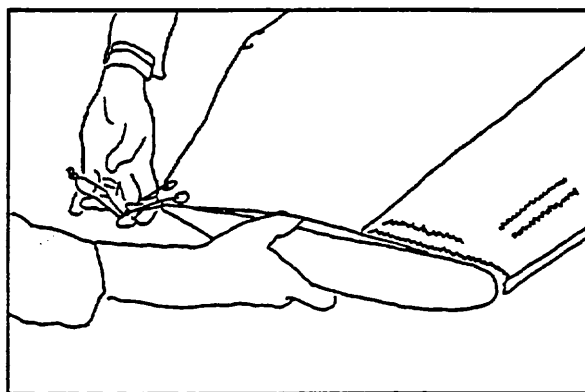


Figure 42

Make sure that the raised ridge on the wingtip fairings lies flush against the edge of the sail, that there are no large gaps in the mating of the fairing to the sail, and that the velcro is securely fastened both top and bottom.

23) Install the bottom surface battens.

(Figure 43) Depending on the production date of your glider, these will have either:

a) No provision for securing the rear end of the batten.

b) A folded pocket termination at the aft end of the pocket to secure the rear end of the batten.

c) A velcro tab at the aft end of the pocket to secure the rear end of the batten.

If there is a provision for securing the batten end, secure it. If not, check your BS battens just before launch to make sure they have not backed out.

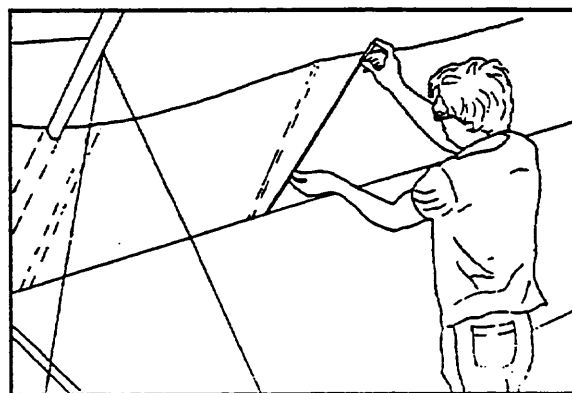


Figure 43

24) Starting at the nose, and working around the glider, do a complete pre-flight of the assembled glider, checking all nuts, bolts, safeties, fittings, cables, battens, etc.

AT THE NOSE:

Check the security of all nuts at the noseplate, and that the safety ring is in place above the nut which is on top of the rear keel noseplate bolt. (Figure 44)

Look in through the nose and visually check the crossbar center junction (safety ring in place on bottom of crossbar hinge bolt) and leading edge / crossbar junction (safety ring in place). (Figure 45)

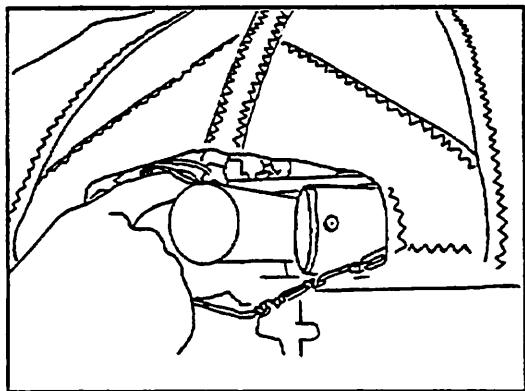


Figure 44

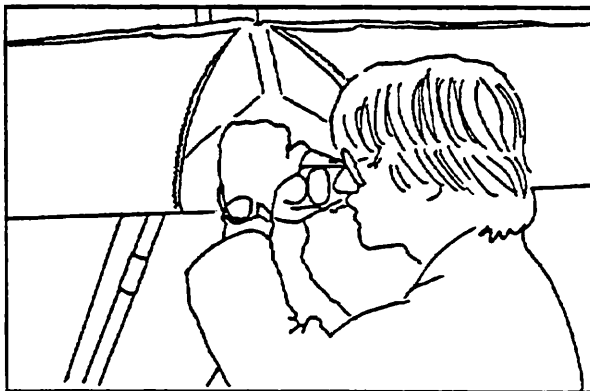


Figure 45

ALONG THE LEFT LEADING EDGE:

Carefully check the entire length of the leading edge pocket to insure that the mylar insert is lying flat in the pocket. If any section of the mylar is folded under, de-tension the crossbar, remove the batten closest to the area of distortion, and unfold the mylar. Failure to correct such a problem will cause a severe alteration of the flight characteristics of the glider which may lead to a dangerous loss of control.

While pushing up on the leading edge between the nose and the crossbar junction, step on the bottom side wire with about 75 lbs. of force. This is a rough field test of the structural security of the side wire loop, the control bar, the kingpost, and the crossbar, and would likely reveal a major structural defect that could cause an inflight failure in normal operation. (Figure 46)

Open the crossbar junction access zipper and reach inside, making sure you can feel that the safety ring on the junction bolt is in place. (Figure 47) Re-close the zipper.

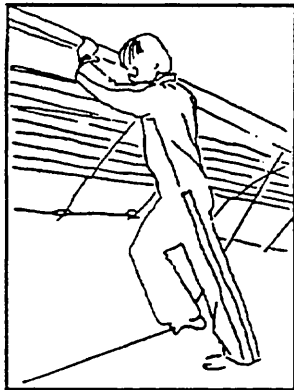


Figure 46

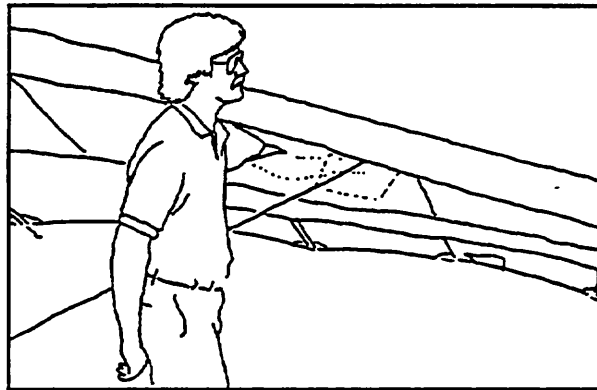


Figure 47

AT THE LEFT TIP:

You have already preflighted those parts of the glider accessible only with the tip fairing removed. At this time, check the tip again for secure and proper installation, and that the washout tip (if so equipped) is securely installed.

ALONG THE TRAILING EDGE, LEFT WING: Check that there are no tears in the sail material along the trailing edge. (Figure 48)

Check that all batten strings are properly secured.

Check that the bridles are properly engaged, with the plastic retainer balls fully seated against the grommet, and that no bridle cable is hooked underneath a more inboard batten. (Figure 49, 50)

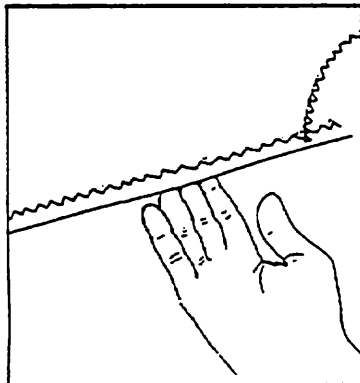


Figure 48

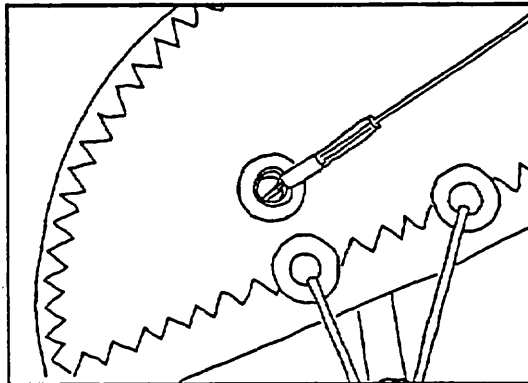


Figure 49

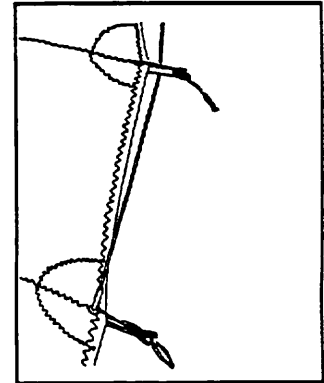


Figure 50 WRONG!

FROM THE REAR KEEL:

Check that the kingpost is properly and securely seated on the keel, that the pin is fully engaged in the slot, and that it is engaged in the proper slot to provide the desired CG location. Also check that the nut is secure on the hang loop bolt (Figure 51)

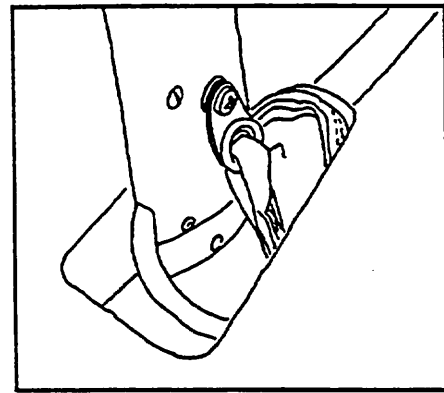


Figure 51

Check that the nuts on the three screws which secure the VG compensator system inside the kingpost are secure. (Figure 52, 53)

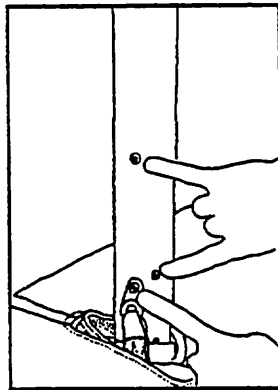


Figure 52

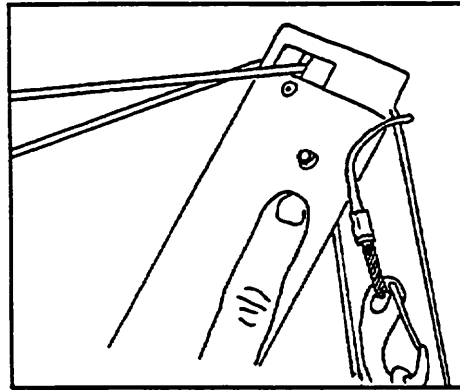


Figure 53

Check again that the bridles are properly routed inside of the top rear wire, and that no thimble or bridle cable is twisted or kinked. (Figure 54)

ALONG THE TRAILING EDGE, RIGHT WING:

Same as for left wing.

AT THE RIGHT TIP:

Same as for left tip.

ALONG THE RIGHT LEADING EDGE:

Same as for left leading edge.

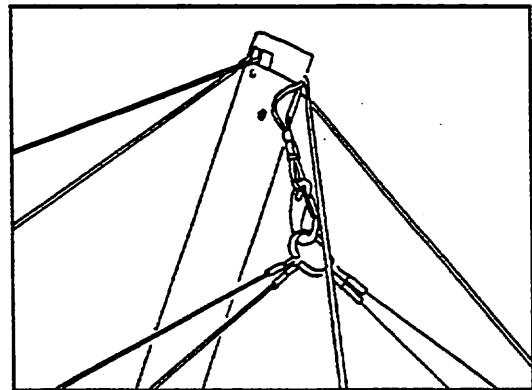


Figure 54

UNDER THE GLIDER, AT THE CONTROL BAR:

Sight down the downtubes, making sure that they are straight. (Figure 55)

Check the cables at the control bar corners, making sure there are no kinks or twisted thimbles. (Figure 56) Check for proper installation of all nuts and safety rings at the control bar corners.

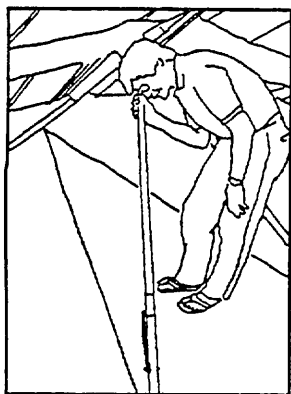


Figure 55

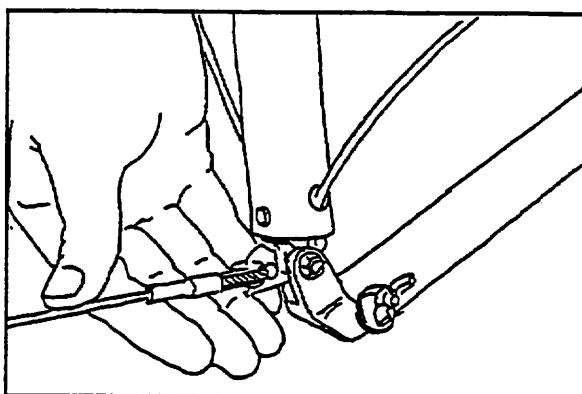


Figure 56

On the right downtube, check the nuts which secure the VG lever bracket to the downtube, and the VG lever to the bracket. (Figure 57)

At the apex, check the nuts on the elbow to top fitting junction, the nut on the horizontal apex bolt, and the safety rings on the top fitting clevis pins. (Figure 58)

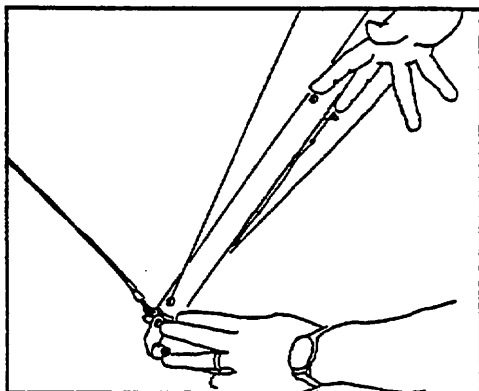


Figure 57

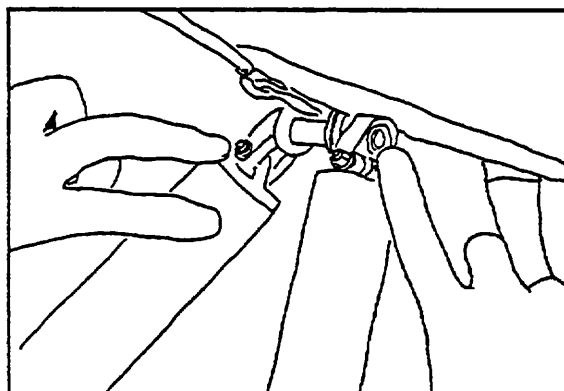


Figure 58

Check that the hang loop is straight, hanging in a proper orientation and that the spreader bar is properly set even with or just below the top of the streamlined leg.

Check the safety on the clevis pin which secures the sail at the rear keel pocket, and the nut on the bottom of the rear wire bolt. (Figure 59)

Check the nuts on either end of the VG activation cable tang, where it connects to the cable and to the lever. (Figure 60)

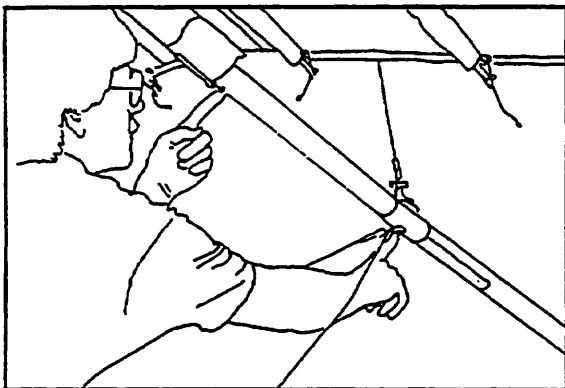


Figure 59

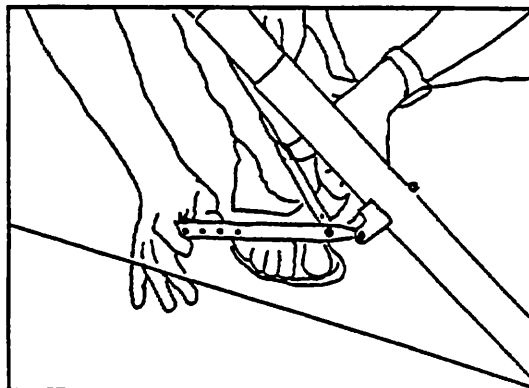


Figure 60

Operate the VG lever, and check that it operates smoothly and properly, that the lever locks over center when down, that the crossbar moves back in the sail when the lever is moved to the downward position, and forward when the lever is let up, and that when the VG lever is moved to the down position (VG tight), the bridle compensator lets the bridle ring down (loosens the bridles). (See Reflex Bridles later on in this manual for a description of the compensation system). (Figure 61, 62)

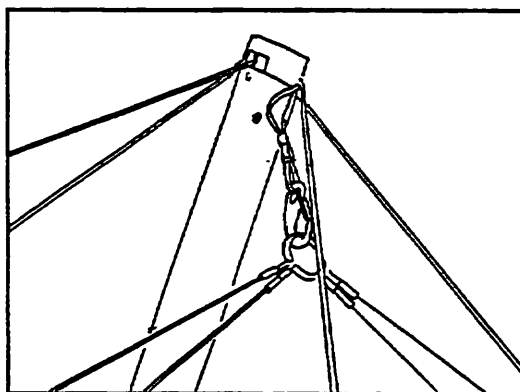


Figure 61

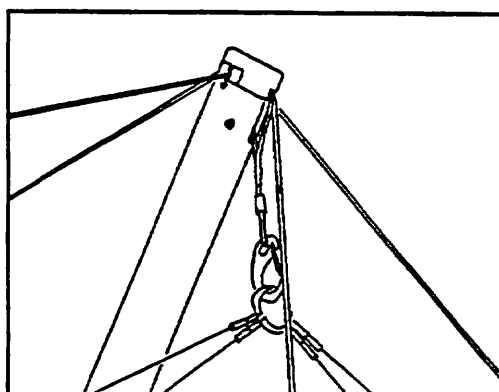


Figure 62

With the VG lever in the **off position (up)** zip the center zipper closed. (Figure 63)

Note: If you close the zipper with the VG lever in the down (on) position, it is possible that one of the VG safety cables will become caught on the nut on the bottom of the keel which secures the PVC cable mount block when you let the VG off. If this happens, the xbar will not slide all the way forward, and you will notice that the VG lever is "loose" due to the resulting slack in the VG activation cable. This will also probably result in a turn in the glider. The glider will still

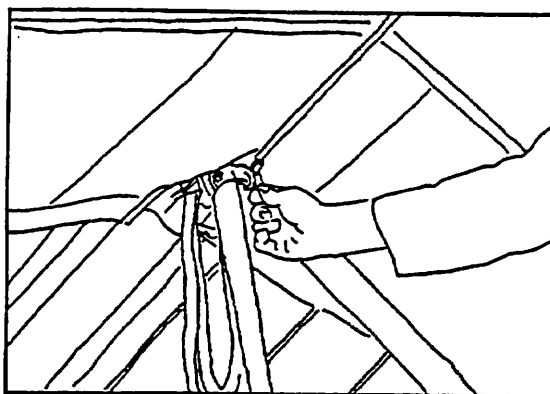


Figure 63

fly OK, and can be flown in this mode to landing, or returned to the VG tight setting.

25) Install the nose cone, mating the velcro surfaces together carefully, and making sure that the nose cone lies flat against the sail on both the top and bottom of the sail. (Figure 64, 65)

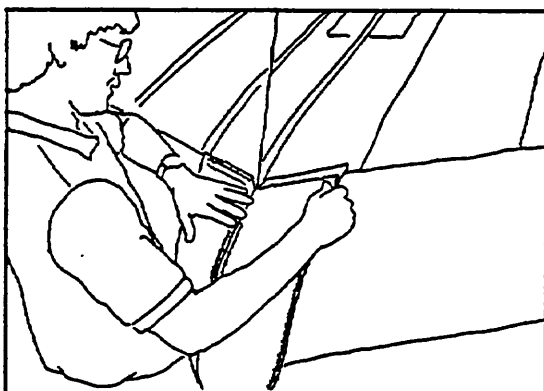


Figure 64

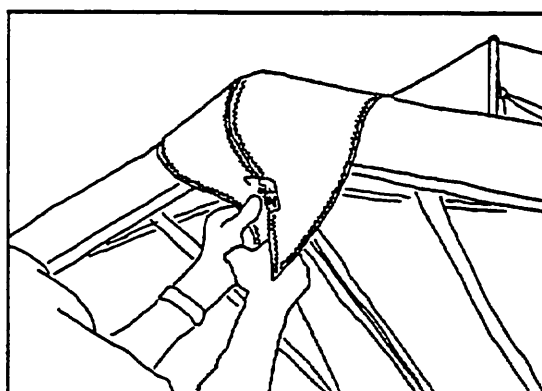


Figure 65

26) Having someone hold the glider by the nose or rear keel (at the rear wire station), hook in and do a hang check, making sure that your harness and parachute clear the basetube through the full range of motion.

LAUNCHING AND FLYING THE HP AT

1) You can launch either VG loose or VG tight. The loose position gives better roll control once airborne, but not as good control of the roll attitude of the glider on the ground due to the increased slack in the side wires. If the wind is more than 10 mph or gusty you should have an assistant on your nose wires on launch, and, if necessary, an assistant on one or both side wires. Make sure all signals are clearly understood. Do a hang check immediately prior to launch. The angle at which you hold the glider should depend on the wind speed and slope of the terrain at launch; you want to achieve a slight positive angle of attack at the start of your run.

2) Run aggressively on launch and ease the bar out for lift off.

3) The flying characteristics of the HP AT are typical of a high performance flex wing. Make your first flights from a familiar site in mellow conditions to give you time to become accustomed to the glider.

4) We recommend that you hang as close as possible to the basetube in the glider - this will give you lighter control pressures and better control.

USING WING TUFTS

Your Wills Wing glider has been equipped from the factory with short yarn tufts on the top surface of each wing. The shadow of these tufts will be visible through the sail. The tufts are useful for indicating the local reversal of the airflow which is associated with the onset of the stall in that portion of the wing. You can use these tufts, as described below, to help determine when you are flying at minimum sink airspeed.

There are two important airspeeds with which all hang glider pilots should be intimately familiar; minimum sink airspeed (hereinafter referred to as MSA) and minimum controllable airspeed (MCA). **The most important of these two is MCA.** Minimum sink airspeed is that speed at which your descent rate is the slowest possible. It is the speed to fly when you want to maximize your climb rate in lift, or slow your rate of descent to a minimum in non lifting air. (You would normally not fly at MSA in sinking air; the strategy there is normally to speed up and fly quickly out of the sink. By minimizing your time spent in the sinking air you minimize altitude lost, even though you have momentarily increased your sink rate by speeding up.)

Minimum controllable airspeed is that speed below which you begin to rapidly lose effective lateral control of the glider. Recognition of this speed and its implications is a more subtle problem than many pilots realize. We have seen several instances of pilots who were having a lot of trouble flying their gliders simply because they were unknowingly trying to fly them too slowly; below the speed at which the glider responded effectively to lateral control inputs. It is our opinion that a great percentage of hang gliding accidents are caused by inadvertent flight below MCA, and subsequent loss of control of the glider with impact preceding recovery. Such incidents are usually attributed to "stalls," but it is not the stall per se that causes the problem, indeed the glider need not even be "stalled" in the traditional sense.

There is no necessary cause and effect relationship between minimum sink speed and minimum controllable airspeed. MSA is determined primarily by the wing loading and span loading, the wing planform, the wing section characteristics, etc. MCA is influenced most heavily by the tension in the sail; how much "billow" the glider has. However, in your Wills Wing glider, as in most hang gliders, MCA and MSA evolved towards a common value during the design and development of the glider. This is so because if the wing is tuned so tight that minimum controllable airspeed is at a higher speed than minimum sink speed, then effective sink rate performance can be improved by loosening the wing so as to lower the minimum controllable airspeed. Conversely, if minimum controllable airspeed is reached at a speed below that of minimum sink, the wing can usually be tightened so as to improve glide performance without significant sacrifice in other areas.

USING WING TUFTS TO FIND THE MINIMUM SINK SPEED OF YOUR GLIDER

On a flex wing hang glider, the wing experiences a gradual and progressive stall, and different spanwise stations of the wing stall at different angles of attack. Contrary to popular belief, a hang glider wing does not stall first in the root or center section. It is true that because of wing twist the root section is at the highest angle of attack relative to the remote free stream airflow, but other factors influence the stall propagation on the wing. Specifically, a flex wing hang glider stalls first somewhere in the midspan of each wing, approximately one third of the way out from the root to the tip, where your tufts are located. As the angle of attack is raised further, the stall propagates both outward towards the tips and inward towards the root. If you wish to observe the stall propagation across the whole wing on your glider, you can cut some more tufts from knitting yarn, about 3-4" long, and tape these to the top surface of your sail across the rest of the span.

During normal flight the flow will be chordwise along the wing, and the tufts will point towards the trailing edge. (Figure 66) When the wing stalls, the tufts will reverse direction, indicating the local flow towards the leading edge. (Figure 67)

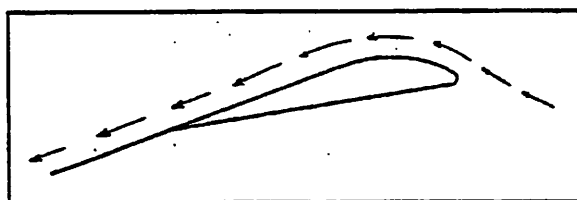


Figure 66





Figure 67

At the first onset of stall, the tufts will sometimes indicate the impending separation by first wiggling, and then deflecting spanwise, before they fully reverse and point forward. The first onset of stall in the midspan occurs well before the familiar "stall break" in which the glider pitches uncontrollably nose down to recover from the stall. By the time the stall break occurs, all tufts but those farthest outboard and those farthest inboard will have indicated reversed flow.

The first onset of midspan stall as indicated by the first tickling of the tufts indicates that you have reached the angle of attack corresponding to the glider's minimum sink airspeed. This will also be very close to the glider's minimum controllable airspeed. (Figure 68)

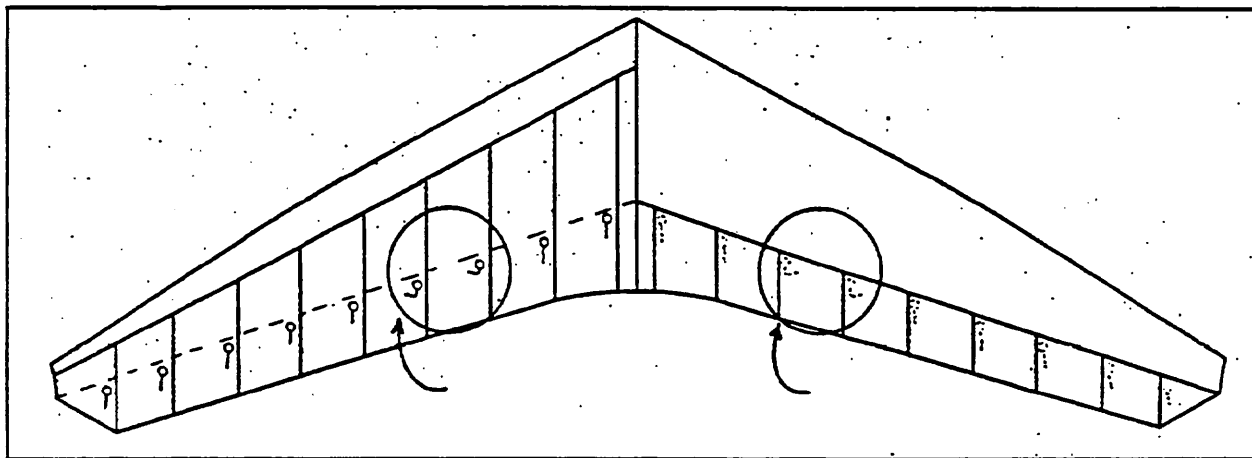

To find the glider's minimum sink speed, fly the glider in smooth air, early in the morning or late in the afternoon. When you are well away from the terrain, and well clear of other aircraft, look up at the wing tufts while you very gradually reduce the speed of the glider. Note the speed at which the first tuft first begins to wiggle just prior to blowing spanwise toward the tip. (If the tufts contain static electricity, they may not show this lateral wiggle prior to reversal. However, you may get other clues to the beginning of separation, such as slight flutter or rumble in the top surface of the sail.) This is your speed for minimum sink rate. Familiarize yourself with the position of the control bar relative to your body at this speed, with the sound and feel of the wind, with the reading on your airspeed indicator if you use one, and with the feel of the glider in terms of pitch and roll pressures. Most of the time when you are flying it will not be practical to look up for extended periods of time at your tufts. That is why familiarization with these other, more accessible indicators is important.

After finding your minimum sink speed, experiment with roll control response at speeds just above and just below this speed to find the value of MCA and the corresponding bar position and other indicators for this speed. Realize that your effective MCA is going to be higher and higher as the air becomes more and more turbulent; control response that is perfectly adequate in smooth air will not be good enough in rougher air. Try flying the glider with the midspan tufts fully reversed; you will probably find that the glider is somewhat controllable, but only with a lot of physical effort. Note that both MCA and MSA come well before the glider actually "stalls" in the traditional sense, i.e. pitches uncontrollably nose down. You may also be able to sense, or your vario may tell you that although the glider has not "stalled" (pitched nose down) your sink rate has increased significantly. In this mode the glider is "mushing."

Once you have familiarized yourself with the glider's characteristics in this range of speeds, you will not need to look at the tufts very often. You will know from bar position and bar pressure, and from the sound and feel of the relative wind when you are at your minimum sink / minimum controllable airspeed. In general, you should not fly your glider below this speed. Be aware, however, that when you are flying at minimum sink in thermal gusts and turbulence, you will experience gust induced separation of the airflow which will periodically cause the tufts on your sail to reverse.

Of course in a turn, your minimum sink SPEED goes up because you are banked, and the bank effectively increases your wing loading which increases your flying SPEED for any angle of attack. But note this: THE TUFTS INDICATE ANGLE OF ATTACK, WITHOUT REGARD TO AIRSPEED! Therefore, if you practice flying various bank angles in smooth air (while well away from any terrain or other gliders) and watch your tufts (on the inside wing, which will be at the highest angle of attack) you will get a feel for the way your minimum sink speed varies at varying bank angles.

Also be aware that in some thermalling situations, such as when trying to maximize climb rate in a thermal with a very strong and very small core, there may be an advantage in overall effective climb performance to flying so slowly that some portion of the inside wing is partially stalled most of the time. This is, however, an advanced and potentially dangerous technique - it is the beginning of a spin entry, and if pushed just a little too far can result in a sudden and extreme loss of control and / or altitude. In general, if the tufts are indicating flow reversal associated with the stall, you will improve both performance and controllability by pulling in and speeding up a little.

One final caution: from time to time a tuft may stick completely to the sail, and fail to properly indicate the direction of local flow. This may result from static buildup, or from the fine threads of the yard becoming caught on a seam or some dirt or imperfection in the sail. The tuft may stick while indicating normal flow, but most often it will stick after having reversed, such that the tuft will indicate a stalled condition that does not exist. One clue in this situation is to note whether or not the tuft is wiggling. Since flow reversal occurs during a turbulent separated flow, a reversed tuft should be wiggling rapidly. If it is not, it is probably stuck. A tuft indicating normal flow will not usually wiggle. An occasional application of silicone spray to the tufts, and making sure that they are positioned so that they cannot catch on any seam will minimize the problem of sticking.

TRIMMING YOUR GLIDER IN PITCH

The fore and aft location along the keel of your hang point is commonly (if mistakenly) referred to as your "CG location." The location of this hang point will, all other things being equal, determine at what angle of attack and airspeed your glider will naturally tend to fly (or trim), and therefore how much bar pressure there is to pull in from trim to a given faster speed, or how much pressure there is to push out from trim to a given slower speed. The farther forward your hang point is, the faster the glider will trim, the less effort will be required to fly fast, and the more effort will be required to fly slow. The CG on the HP AT is adjustable in four positions; by moving the pin in the base of the kingpost to one of two holes, and by installing the pin in one of two slots in the ridge on top of the keel center bracket. If the pin is in the forward of the two holes in the kingpost base, and the pin is set in the forward of the two slots on top of the keel, this will give the forward middle CG adjustment. If the pin is in the aft hole in the base, the aft slot will give the aft middle CG adjustment. The forward hole in the base in combination with the aft slot on the keel gives the full aft CG adjustment, and the aft hole / forward slot gives the full forward CG adjustment. Each increment of adjustment is $5/8$ ", or about two miles per hour, and the total range is $1\ 7/8$ ". (Figure 69)

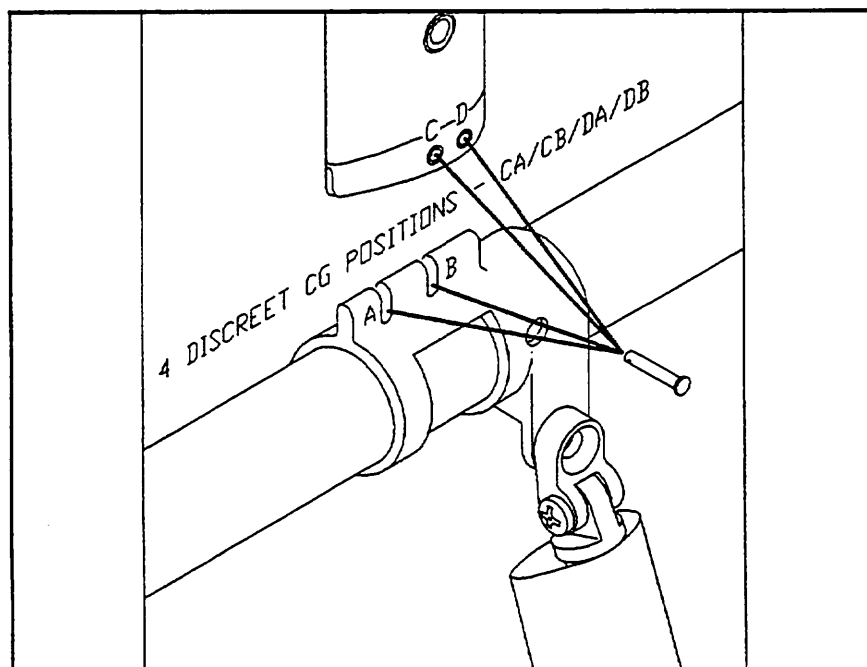


Figure 69

PLEASE NOTE: We recommend that you not stow your glider bag, or any other cargo on the glider. The practice of putting your glider bag inside the sail, for example, can drastically alter the pitch trim and static balance of your glider, and adversely affect its flying and landing characteristics. The best place to carry your glider bag or other cargo is in your harness.

The best way to set your CG is to decide first where you want to trim relative to your minimum sink speed. Some pilots like to trim at minimum sink, (because they don't like to push out all the time in thermals). Other pilots prefer to trim somewhere between minimum sink and best L/D (because they don't like to pull in against heavy bar pressure during long glides at high speed).

Once you have decided where to trim relative to minimum sink speed, use the method above to find minimum sink speed and adjust the hang point location accordingly. We recommend that you not trim your glider below MSA.

In the absence of the use of tufts, it has become common for pilots to talk about bar position, or about indicated airspeed, when trying to communicate how to trim a glider properly or how to fly a glider at the proper speed for a given situation. The problem is that these methods are unreliable and inconsistent from one pilot to another even on the same glider. The angle at which your harness suspends your body in your glider has a great deal to do with your perception of the bar "position" relative to your body. Airspeed indicators vary in their indicated airspeed depending on the make of the instrument, its calibration, any installation error, etc. The use of tufts gives you an absolute first hand indication of the actual aerodynamic event associated with two critically important airspeeds on your glider. It is a potentially useful tool that may improve your flying.

USING THE VG SYSTEM

The HP AT has a lever and cable activated two position variable geometry system for in flight changes of the glider's sail tension. The system works by pulling the crossbar center aft 3" to achieve a tighter sail. The 3" range of travel of the VG system is fixed, but the position of this range of travel is adjustable by plus or minus 3/8" at the junction of the activation cable tang to the activation lever. The loose VG setting (lever up) is recommended for achieving best effective climb rate and most responsive handling when flying in conditions which require the most immediate possible control response. The tight VG setting (lever down) is recommended for achieving best L/D at high airspeeds, when penetrating a head wind, or flying through sinking air. The tight VG setting results in higher roll control pressures and a slower roll rate.

Please note that the Wills Wing VG system is substantially different from other VG systems with which you may be familiar. On other VG gliders, the "full loose" VG setting is associated with a very loose sail adjustment, a correspondingly high level of wing twist, and a significant degradation in performance. There is no VG setting on your HP AT which corresponds to the "full loose" setting on other VG gliders; the HP AT "loose" setting corresponds more nearly to a "1/3 to 1/2 on" setting. The HP AT loose setting has been chosen so as to be tight enough that there is no significant loss of sink rate or low speed performance at this setting. Consequently, we recommend that you use the loose setting whenever you are flying at or near minimum sink speed, unless you are in very smooth air, and / or are far enough away from the terrain and other gliders that you are able to sacrifice some degree of control response.

Prior to switching to VG tight, it is best to swing your upper body slightly to the right and push up slightly on the base tube, so that the weight of your upper body is positioned somewhat over the lever. Then, when you pull down on the lever it will activate quickly and easily. When activating the VG lever, make sure to pull it straight down around its designed axis of rotation, and do not pull it to one side as you pull it down. Before releasing the lever or removing your hand make sure that the lever has locked over center and is full against the back side of the downtube.

When activating or releasing the VG lever, do so slowly and smoothly. Never flip the lever off and let the crossbar slam forward, as this may cause damage to the glider.

LANDING THE HP AT

We recommend using an aircraft landing approach (45 entry leg, downwind leg, base leg, and final leg) whenever possible, and we suggest that you practice making your approaches with as much precision as possible.

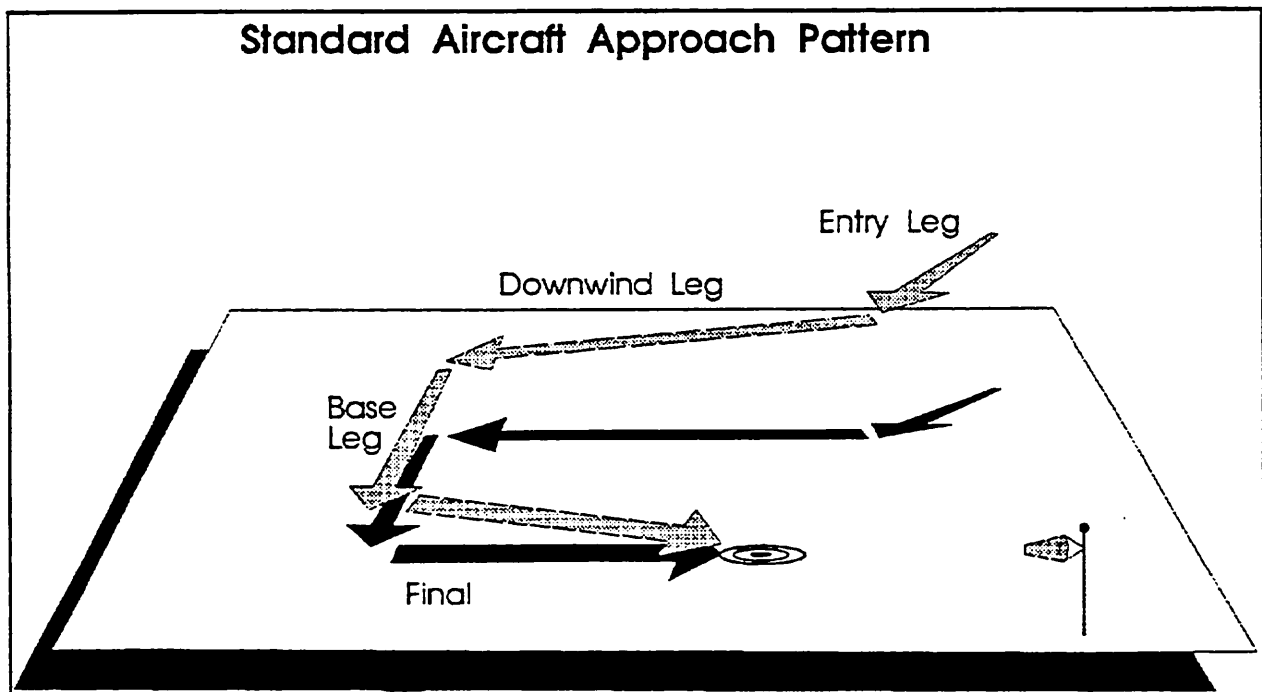


Figure 70

Under ideal conditions, landing approaches are best done so as to include a long straight final into the wind at a speed above best L/D speed. Making your approach VG off will increase your lateral control authority and shorten the length of your final "float" and is therefore recommended, especially in light winds when landing in a smaller field. In a very limited field, or a field which slopes slightly downhill, when landing in light wind, you may need to make your final approach at a slower speed, perhaps as slow as minimum sink, in order to be able to land within the field. In winds of less than 5 mph, if the slope is steeper than 12:1, you should seriously consider landing downwind, uphill; or crosswind, across the slope.

Making your approach VG off will also increase the glider's roll sensitivity, and some pilots have had difficulty with roll yaw oscillations on final. The best way to avoid this is to fly your entire approach at a constant airspeed, and to control your touchdown point by making adjustments to the shape of your pattern. In particular, you should avoid the technique of make a diving turn onto final. This maneuver, sometimes called a "slipping turn" is often taught to hang glider pilots as a way to lose altitude during the approach. It works reasonably well with low performance low aspect ratio gliders which have high levels of yaw stability and damping, and which are able to lose energy by diving because of the large increase in drag at higher speeds. On a high performance glider, this technique serves only to convert the energy of altitude to energy of speed, while at the same time suddenly increasing the glider's sensitivity to control inputs. The result is a high probability of overshooting the intended landing point and the prospect of roll / yaw oscillations which may interfere with a proper landing.

On final approach, fly the glider down to within just a few feet of the ground, and bleed off excess speed in ground effect while keeping the wings level and the nose into the wind. Your body position should be inclined with your head and shoulders forward and your feet and legs trailing behind, with your hands at shoulder width and shoulder height on the uprights. As the glider begins to settle in a mush, and before you have extended your arms significantly, give a sharp aggressive flare pushing your arms and shoulders forward and your hips, legs and feet backwards. The braking effect of the flare will allow your feet to swing under you as the glider's forward motion is arrested. (Figure 71, 72)

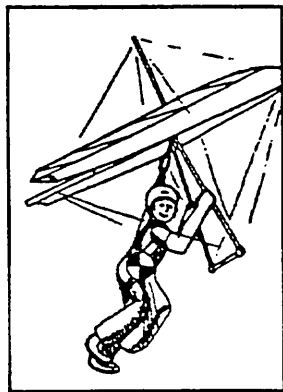


Figure 71

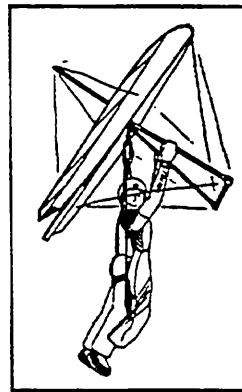


Figure 72

Note: Landing in a significant wind does not require a substantial landing flare; the pilot merely slows to near zero ground speed and touches down. The proper flare in light or no wind conditions is a dynamic action which causes a sudden and severe pitch up rotation of the glider. Pilots who have trouble with the flare, and with the glider nosing over during landing, usually do so because of one of the following problems:

a) Harness leg straps too long / hanging too low below the glider, and / or hands too low on the control bar. This reduces pitch authority and prevents an adequate flare.

(Figure 73)

b) Improper body position - pilot leaning back, (away from the anticipated hard landing), with feet extended in front. (Figure 74) This moves the pilot's center of mass forward ahead of his shoulders, effectively shortening the pilot's arms and reducing flare authority. The proper position is with the pilot's body inclined forward, with the shoulders out ahead of the pilot's center of mass. Thinking about pushing "up" instead of "out" when flaring may help you to maintain the proper forward inclined body position.

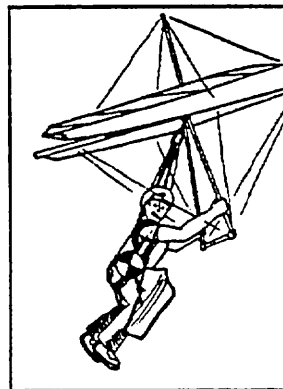


Figure 73

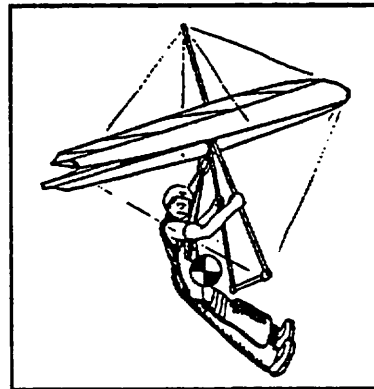


Figure 74

c) Waiting too long to flare. It is possible to fly the glider into a mush on the final approach, and reach a point where your arms are extended to the point where you have insufficient reach left with which to flare. It is far better to flare a little early in this situation and climb a few feet before touching down than to flare late and land with high forward speed.

HP AT BREAKDOWN

Breakdown is the exact reverse of assembly.

- 1) Remove the nose cone and pull the nose batten out two inches past the noseplate.
- 2) Detach the bottom nose wires by pulling down on the nose of the glider while pushing upwards on the plastic tang handle on the keyhole tang. (Figure 75) Disengage the aluminum keyhole safety lock prior to attempting to disconnect the tang if so equipped.
- 3) Before you de-tension the crossbar, remove the plastic wing tips, the number one battens, the washout tips (if so equipped), and remove the first three (outboard most) cambered battens on each side. Roll up the sail at the wingtip and slide on the wingtip cover bag. Place the plastic wingtip fairings in the wingtip cover bags and secure the velcro tab on the bag. (Figure 76)

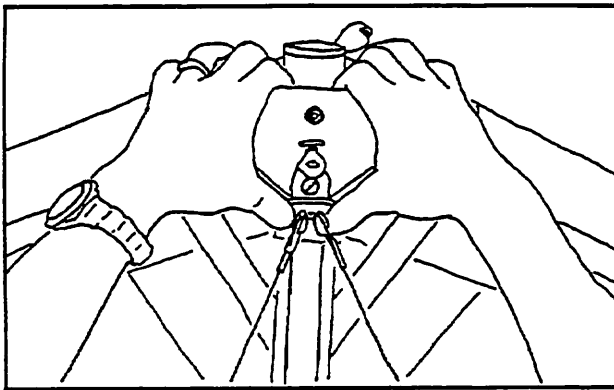


Figure 75

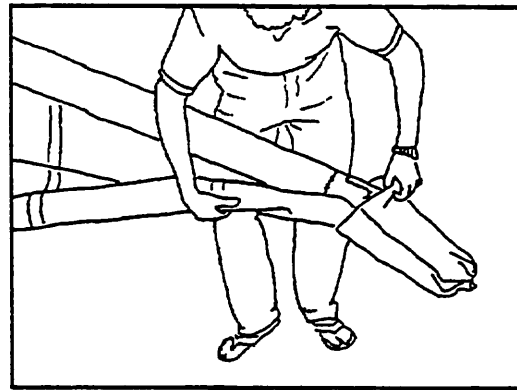


Figure 76

- 4) At the control bar apex, pull the hang loop spreader bar downwards as far as it will go. Detach the crossbar safety restraint cable and replace the nut and safety on the bolt. Use the perlon as you did during set up to pull the crossbar back and take the load off the VG activation cable. Detach the VG activation cable by removing the ball lock pin and re-install the pin in the activation cable tang for storage. (Figure 77, 78)

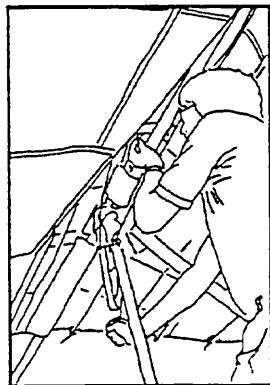


Figure 77

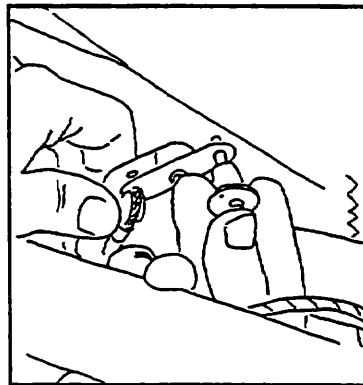


Figure 78

(Note: **Do not** store the pin in the crossbar center tang; the plates will come together and crush the pin when you fold in the leading edges.

Detach the perlon and allow the crossbar to slide forward, de-tensioning the sail.

Unstow the apex protector pads from inside the double surface and install them around the tops of the control bar legs. Secure the velcro tabs. (Figure 79)

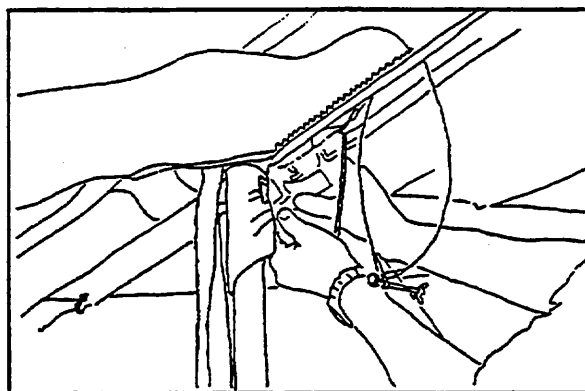


Figure 79

5) Fold the wings in about 1/4 of the way. Remove all the remaining battens, (except the nose batten) including the bottom surface battens. Place the cambered battens in the batten bag.

6) Place the kingpost base protector around the kingpost base with the VG compensator cable passing through the slot in the protector, and secure by pressing the velcro surfaces together. (Figure 80, 81)

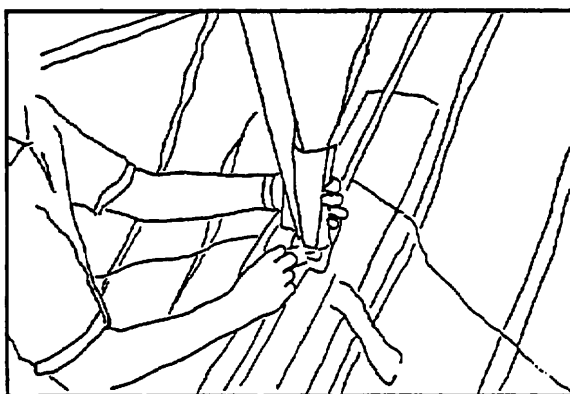


Figure 80

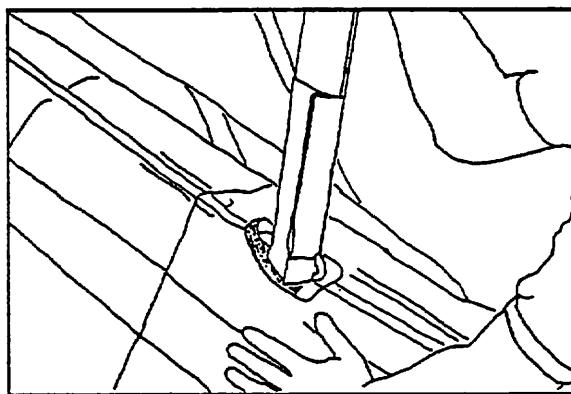


Figure 81

7) Detach the top rear wire at the rear keel. Detach the bridle ring from the bridle snap clip. Loop the top rear wire around the bridle cables and pass the keyhole tang through the elastic webbing band at the top of the kingpost top cover. (Figure 82)

Remove the kingpost from the kingpost base. Install the kingpost top protector over the top of the kingpost. (Figure 83)

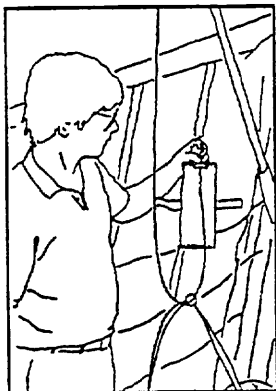


Figure 82

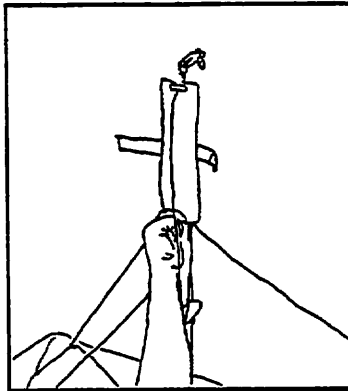


Figure 83

8) Lay the kingpost down on top of the sail along the keel, and attach the velcro on the kingpost top protector to the nose cone velcro on the sail to hold the kingpost in position. (Figure 84)

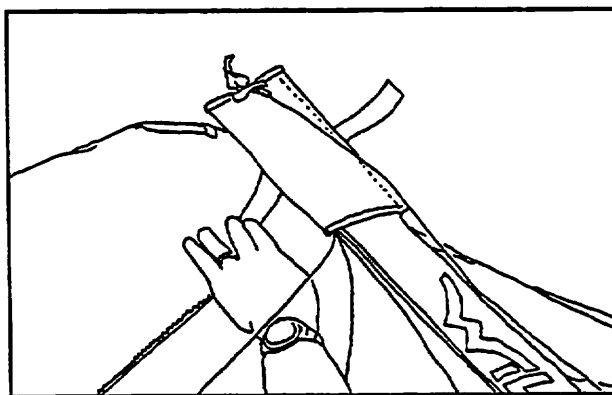


Figure 84

9) Fold the wings in the rest of the way and pull the sail over the top of the leading edges. Roll the straight battens and the washout tips in the sail, and tie the sail with the velcros provided. We recommend that you roll and tie each side of the sail separately. (Figure 85, 86)

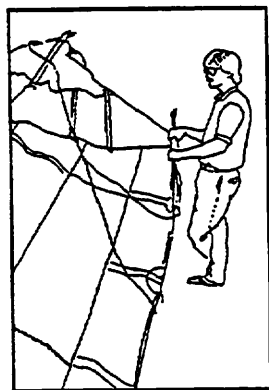


Figure 85

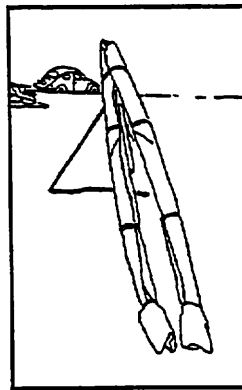


Figure 86

10) Put the bag on the glider, flip it over and lay it down.

11) Detach the upright from the basetube, and fold up the control bar. **Note: When removing the aluminum fitting from the basetube, grasp the fitting along the central axis of the basetube and pull it straight out. Any load applied to the fitting during insertion or removal which causes it to cock at an angle to the basetube can contribute to galling of the aluminum and can result in the fitting becoming permanently stuck in the basetube. If removal of the fitting becomes difficult, contact your Wills Wing dealer.**

Put the cover bag on the control bar and pull it all the way forward. Lift the hang loop spreader bar and turn it 90 degrees so that you can lay it between the control bar downtubes before you lay the control bar down against the keel. (Figure 87, 88)

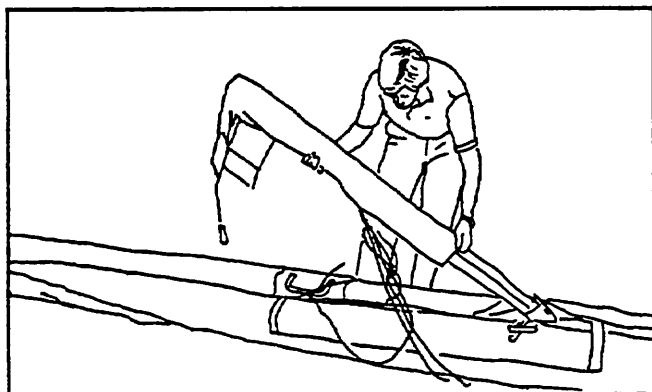


Figure 87

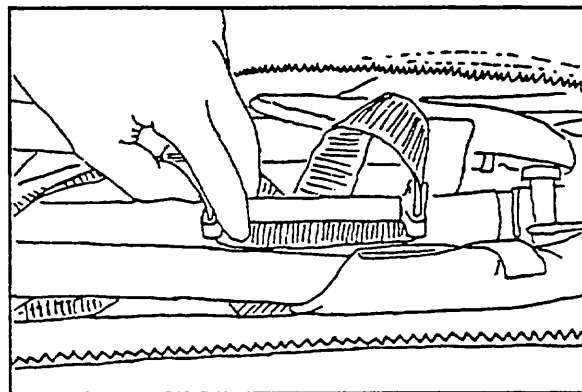


Figure 88

12) Slide the protective pad on the control bar bag under and around the keel tube at the rear wire bolt. Install the keel end protector cover. (Figure 89, 90)

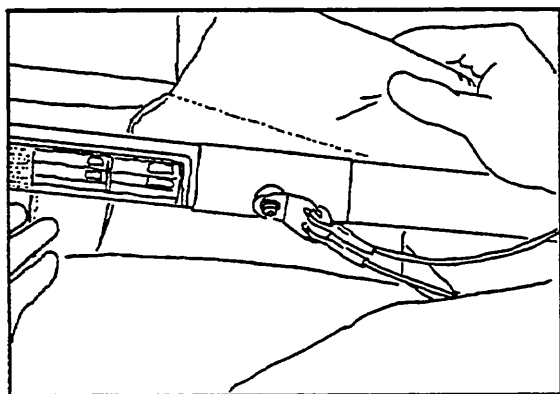


Figure 89

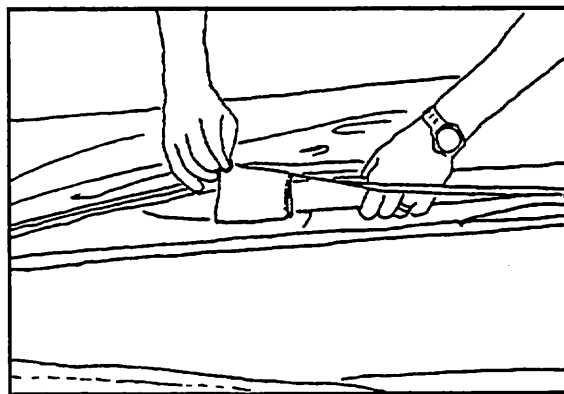


Figure 90

13) Put the batten bag on the battens. Stow the battens between the rear leading edges. Stow the nosecone under the forward velcro sail tie. (Figure 91, 92) Zip up the bag.

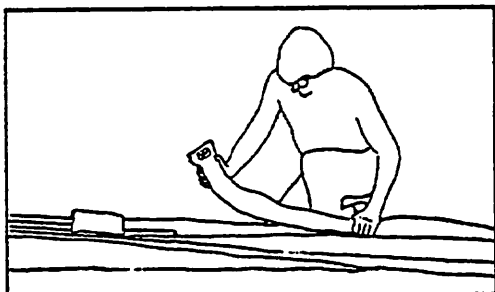


Figure 91

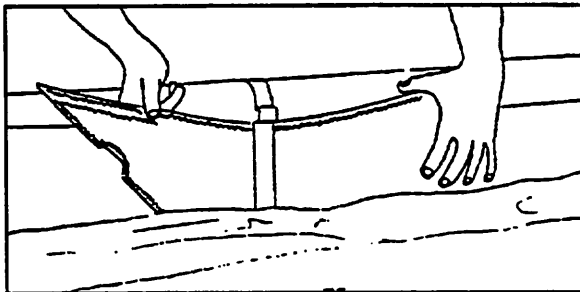


Figure 92

HP AT STABILITY SYSTEMS

Stability in pitch is provided by reflex in the root section, which is determined by the lengths of the kingpost, control bar, and front to rear top and bottom wires, by reflex support bridles running from the kingpost to the trailing edge at the number 5 and 7 battens (1990 and previous models) or to the number 4 and 7 battens (1991 models), and by washout tips which are factory set at 11 degrees above the horizontal plane and are not adjustable (1990 and previous models only) Correct attachment and proper adjustment of the bridles are critical to providing adequate stability at low angles of attack, particularly those below the normal operating range.

REFLEX BRIDLE ADJUSTMENT AND COMPENSATION

As a starting point to adjusting the bridles, the bridles should be set so that a tape measure hooked over the top front wire at the kingpost cap and extended to the intersection of the batten pocket seamed edge and the sail trailing edge measures as follows (VG set LOOSE):

1989/ 1990 Bridle Checking Specs

HP AT 158:	Inner: 99.5"	Outer: 142.625"
HP AT 145:	Inner: 93"	Outer: 135.125"

1991 Bridle Checking Specs

HP AT 158:	Inner: 99.25"	Outer: 164.625"
HP AT 145:	Inner: 92.875"	Outer: 157.0"

The bridles are adjusted inside the kingpost as described below. The glider must be fully assembled to measure the bridles.

Following the initial adjustment of the bridles to these measurements, the glider must be flown, and the shadow of the bridles sighted against the sail. The bridles are correctly adjusted when they are as tight as they can be, without actually being tight in flight to the point where there is tension in the bridles cables in normal one G flight.

The bridle adjustment is automatically compensated for changes in VG setting or adjustment by the cable compensation system that attaches to the VG activation cable at the tang where it attaches to the crossbar. (Figure 93) This cable runs through the cable housing into the bottom rear of the kingpost, through a two to one pulley reduction system, and exits at the top rear of the kingpost where it terminates in the bridle snap hook which attaches to the bridle cable ring. As the crossbar is pulled back three inches by pulling down the VG lever, the bridles are lowered 1.5" to maintain the same effective

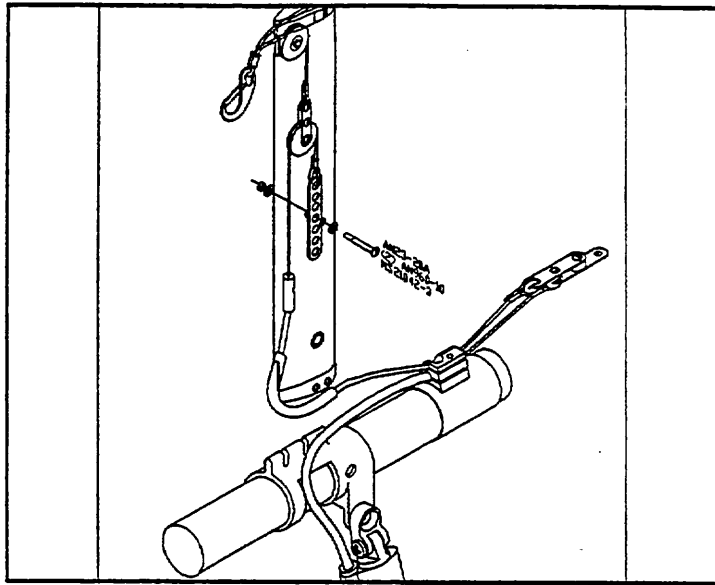


Figure 93

adjustment. (Sighting the bridles should be done VG Loose, because there may not be enough weight on the bridle cables in flight to pull them down when the VG is switched to tight, and therefore the bridles when sighted VG tight may appear tighter than they actually are.)

One end of the lower bridle cable terminates in an adjustable tang which is secured inside the kingpost as shown in the accompanying diagram, eight inches from the bottom of the kingpost. To adjust the bridles, remove the kingpost base plastic insert from the bottom of the kingpost by drilling out the securing rivets. Attach the bridle adjustment tool (merely a short piece of small diameter tubing with a slot in one end to grab the adjustment tang) to the adjustment tang by pushing it onto the tang from the bottom. Then remove the securing bolt which holds the tang in position, and either pull the tang (to tighten the bridles) or push it up (to loosen the bridles) until the next hole aligns with the holes in the kingpost, and then re-install the bolt and nut. The holes in the tang are 3/4" apart, and because of the two to one reduction, each 3/4" adjustment at the tang results in a 3/8" raising or lowering of the bridles.

MAINTENANCE SCHEDULE:

You should continually maintain your glider in a proper state of tune and repair to insure optimum airworthiness, performance and flight characteristics. Failure to properly maintain your glider may lead to a dangerous loss of strength, stability or control responsiveness of the glider. Following any mishap that results in damage to the glider immediately have any damaged component repaired or replaced. We recommend that you have all such maintenance work done by your Wills Wing dealer. In addition, please follow the following maintenance schedule:

EVERY MONTH:

- 1) Spray all zippers on the glider with silicone spray lubricant. Also spray your battens as you install them in the glider to lubricate the insides of the batten pockets. Do not use any other type of lubricant. Wipe off any excess silicone so that it does not attract dirt. If you fly in a dusty or sandy environment, it will help to prolong the life of your batten pockets if you wipe each batten with a rag before you install it in the sail.
- 2) Check your battens on a flat level floor against the batten diagram provided, and correct any that deviate from the pattern by more than 1/4".

EVERY SIX MONTHS:

- 1) Have a complete inspection performed on the glider and replace any suspension system component that shows any wear, and any cable that shows any kinks, wear, damage, corrosion, etc.
- 2) Inspect all bolts for tightness, all safeties for proper installation and possible damage. Inspect plates and fittings for damage, holes in tubes for elongation.
- 3) Inspect the sail for wear, tears, UV damage, loose stitching, etc.

EVERY YEAR:

- 1) Have the sail completely removed from the frame, and disassemble all frame components. Inspect every part of the glider for any damage or wear. Inspect the tubes for straightness and for signs of corrosion. Anytime you have the sail off the frame, turn the sail inside out through the bottom surface center zipper and inspect all of the batten pockets and batten pocket terminations.
- 2) Replace bottom side wires and hang loops.

SPECIAL CIRCUMSTANCES

- 1) Any time you suffer a crash or extremely hard landing you should have an "annual" inspection done on your glider to insure that you find all damaged parts.
- 2) If your glider is ever exposed to salt water you will need to have the glider completely disassembled in accordance with the recommended annual inspection procedure. All frame parts will need to be disassembled, including the removal of all sleeves, flushed liberally with fresh water, dried completely, and treated for corrosion inhibition with LPS-3 or other suitable agent.
- 3) Cleaning Your Sail - Keeping your sail clean will extend the life of the cloth. When cleaning the entire sail you should generally use only water and a soft brush. You may clean small spots or stains with any commercial spot remover that is labeled for use on polyester. Such cleaning agents are available at the supermarket or drug store, or you may order a cleaning solution from Wills Wing through your dealer.

REMOVING THE SAIL FROM THE AIRFRAME AND RE-INSTALLING

Many maintenance and repair procedures will require the removal of the sail from the frame. Please follow these instructions when removing and re-installing the sail. Please read all the instructions for each operation before beginning.

SAIL REMOVAL

You will need an unobstructed area six feet by thirty feet. Make sure the surface is clean. If it is abrasive, like rough concrete, you should either put down a protective tarp or be extremely careful not to scrape your sail.

- 1) Lay the glider on its back, unzip and remove the glider bag and put the battens aside. Remove the control bar bag.
- 2) Cut or untie the string sail mount at the nose. Spread the wings slightly, undo the velcro tabs inside the rear ends of the leading edges and then dismount the sail from the rear leading edges. Tape the sail plugs in position on the leading edges so that they do not become switched side to side inadvertently.
- 3) Unbolt the bottom side wires from the control bar. Unbolt the control top elbows at the control bar apex from the CG bracket on the keel. Unbolt the bottom rear flying wires from the rear keel. Re-assemble the hardware removed onto the bolts in the original order so that it doesn't get lost. All disassembled assemblies on the glider must be re-assembled in the proper order and orientation. Use the exploded parts diagrams in this manual to help you. On the bottom rear wire, the relative position of the washers, saddles and tangs affects the front to rear wire tension.
- 4) Undo the velcro which holds the front part of the keel pocket together. Cut off plastic wire tie around VG cables and keel. Disconnect the VG cable tang from the lower compensator cable tang at the PVC block mounted on top of the keel. Loosen the screw on the top of the PVC block so that you can pull the compensator and VG activation cable housings out of the back of the block. Then remove the screw and pull the cables themselves out of the slots on the side of the block. Set the control bar aside.
- 5) Turn the glider over. Unroll the sail until you can reach the bridle attachments at the trailing edge. Remove the plastic bridle retainer balls and disconnect the bridles from the sail.
- 6) Remove the screw that holds the kingpost top cap in place and carefully remove the cap. Remove the top front and top side wires from the kingpost top. Re-install the cap. Unbolt the hang loop from the kingpost, and detach the backup hang loop from the keel. Set the kingpost aside.
- 7) Disconnect the sail from the keel at the rear of the keel pocket.
- 8) Feed the top and bottom side wires into the sail through the holes in the sail. Turn the glider over onto its back again. Slide the frame out through the nose of the glider. Slide

the hang loop off the end of the keel as the frame slides out of the sail. If you encounter resistance, stop and find out what is hanging up. The nose of the sail is very tight as it goes over the crossbar center. Make sure the wings aren't spread apart and work the sail carefully over this part.

9) If you need to send the sail into the factory for repair, remove the mylar. It usually slides out the front of the pocket without undue difficulty. It helps to secure the rear end of the sail to something solid, so that you can lay the leading edge out straight and pull the mylar straight out of the pocket. If you have trouble getting it to slide out freely, it is probably because the edge of the mylar has worked its way into the seam and gotten stuck on the adhesive seamstick tape. Work your way up and down the leading edge pocket rolling the mylar away from the seam until it is free along its entire length. Fold and package the sail carefully if you plan to ship it in for repair. Be sure to include written instructions of what you want done, your name and a phone number where you can be reached during the day.

RE-INSTALLING THE SAIL ON THE FRAME

1) Install the mylar in the sail. (If the mylar pockets have been replaced you will need to trim the mylar by 1/2". Also, the sail will probably need to be mounted looser.) Make sure you install it right side up; the curved edge is at the front and on the bottom. The easiest way to install the mylar is to push it into the pocket using a long lofting batten attached to the rear end of the mylar insert. A small diameter pin on the end of the lofting batten placed through a small hole in the aft end of the mylar insert allows you to push the mylar into the sail and remove the batten while leaving the mylar in place. You will have to stop from time to time to make sure the mylar is properly lying flat in the pocket. Do not push the mylar too far into the pocket; stop when the top side wire hole in the mylar lines up with the hole in the sail.

2) Position the sail on the floor with the keel pocket up and the wings folded over so that the leading edges lie along the length of the root line, with the mylar pockets lying on top.

3) Prepare the frame, making sure that the side wires are pulled forward from the crossbar leading edge junction and are not wrapped around the frame.

4) Position the frame with the bottom of the noseplate facing up and with the rear end of the leading edges at the nose of the sail. Slide the frame into the nose of the sail, making sure that the leading edges of the frame pass properly into the leading edge pockets of the sail and don't get caught at the rear of the bottom surface near the root. As you feed the frame slowly into the sail, check periodically to see that none of the hardware is snagging on the sail.

5) When the rear end of the keel reaches the keel pocket, slide the hang loop over the end of the keel, making sure it is properly oriented, and slide the keel into the keel pocket.

6) When the crossbar center junction reaches the nose of the sail, it will be a very tight fit. Work the sail carefully over the junction and continue.

7) After the frame is fully installed, mount the webbing anchor loops over the rear leading edge endcaps. **Make sure you mount the inner webbing loops in the endcap slots, not the outer "handle" loops!** Make sure that the webbing lies flat and smooth in the slot, and that the sail is properly aligned when mounted. Secure the velcro retainer tabs. Install the nose string sail restraint as tight as you can at this time; you will need to tighten it later after the glider is set up.

8) Working through the camera mount zippers, insert the top and bottom side wires through the holes in the sail, making sure that no cable is wrapped around a leading edge or crossbar, and that no thimbles are cocked or twisted.

9) Bolt the bottom rear wires to the rear of the keel. Install the control bar onto the keel center bracket, and attach the bottom side wires to the control bar corners.

10) Flip the glider up onto the control bar. Working through the center bottom surface zipper, insert the top front wire up through the hole in the sail.

11) Re-install all the top wires onto the kingpost.

12) Spread the wings slowly and carefully, making sure that the sail rides forward as necessary at the nose without catching. **Be careful: you can easily tear the sail open at the nose at this point.**

13) Set the kingpost on the keel center bracket. Connect the top rear wire, and the bottom front wires. Connect the bridles to the sail.

14) Route the VG activation cable and lower compensator cable to the PVC block, re-install the cables in the block and re-connect them together. Install and tighten the screw on the block which clamps the cable housings in the block after making sure that the housings are seated all the way forward.

15) Re-attach the rear keel pocket sail mount to the keel. Bolt the hang loop to the kingpost, and re-attach the backup loop to the keel.

16) Finish the assembly of the glider completely according to normal assembly procedures.

17) Re-adjust the nose sail mount string so that it is slightly slack. Do a very careful and complete pre-flight of the glider according to the normal pre-flight procedure as explained earlier in this manual.

TUNING

DISMOUNTING AND RE-MOUNTING THE SAIL AT THE TIP

A number of tuning procedures require you to dismount the sail at the rear leading edge. On the '91 models, without washout tips, this can be most easily accomplished by using a large, flat bladed screw driver to pry the sail mount webbing off of the end of the leading edge. The same technique can be used to re-install the sail. Take care not to damage the sail mount webbing, and when re-mounting the sail, be sure to mount the inner webbing in the slot, not the outer handle webbing, and be sure that the webbing seats squarely in the slot.

CG ADJUSTMENT has already been covered in the section of this manual on using your wing tufts. Wills Wing recommends that tuning other than CG adjustment be performed by your Wills Wing dealer.

TURN TRIM

Turns are caused by an asymmetry in the glider. If you have a turn, first try to make the glider symmetrical in every way.

AIRFRAME

Check the leading edges for possible bent tubes. Check that the keel is not bent to one side.

Check for symmetrical twist in the leading edges (on pre 1991 models, sight the height of each washout tube relative to the other by standing at the nose with the glider about level in pitch and sighting each washout tip over the high point of the nose batten. On 1991 models, check for symmetry in the alignment of the sail mount plugs.)

BATTENS

Check the battens for symmetrical shape and batten string tension.

SAIL TENSION

Check for symmetrical sail tension on the leading edges (sight the hem of the sail at the bottom of the leading edge tube relative to the noseplate on each side). Sail tension is adjusted by adding or removing shims in 1/8" or 1/4" increments from inside the sail mount plugs on the rear ends of the leading edges.

SAIL PLUG ROTATIONAL ALIGNMENT

Check for symmetry in the alignment of the sail mount at the tips. (Raise the number two batten until the bottom surface at the tip just goes tight, and see how high off the washout tip the batten is.)

After you have made everything symmetrical, if you still have a turn, remove the sail mount plug from the wing away from which the glider is turning. Drill out the pop rivet that secures the slotted endcap in the plug, and twist the plug one rivet hole diameter in such a direction so as to raise the trailing edge of the sail on that wing. Install a new rivet and re-install the plug in the leading edge, and the sail onto the plug. If the sail is already twisted up at the tips such that the bottom surface at the tip does not go tight in flight, then you will need to twist down instead of up, and to twist that wingtip towards which the glider is turning.

ADJUSTING BATTEN TENSION

All battens are tensioned by looping the batten string over the notched end of the batten twice. The inboard batten strings should be slightly on the loose side, and the outboard batten strings should be progressively tighter. The number one batten strings should be quite tight, and when they are properly adjusted you will not be able to install them unless the crossbar is tensioned.

LEADING EDGE SAIL TENSION

The tension in the leading edge of the sail, adjustable by shimming as described above, will influence the performance and handling of the glider. If the sail is mounted too loose, the performance will deteriorate noticeably. If the sail is mounted too tight, the glider will handle poorly; it will be stiff and slow in roll response with excessive adverse yaw. As the glider gets older and the sail stretches, you will need to add shims to maintain the proper tension.

REPLACING A VG SIDE CONTROL BAR DOWNTUBE

To replace the right side downtube, you will need to remove and re-install the VG activation cable, and lever activation system. Detach the cable clevis fork from the long tang which is attached to the activation lever. Detach the top and bottom end fittings from the downtube. Remove the white plastic rivet from the side of the downtube which secures the internal cable guide (located just above the slot where the activation cable exits to attach to the lever.) You can pry this rivet out with the blade of a pen knife or small screwdriver. Slide the activation cable out of the top of the downtube. Remove the lever bracket and lever assembly from the old downtube and install it on the new one. Install the cable into the new downtube. You will need to spread the sides of the slot slightly to fish the clevis end of the cable out through the slot. (A pair of circlip pliers works well here, but a large screwdriver blade will also do.) Align the notch in the black plastic cable guide with the hole in the side downtube and install the plastic rivet to secure the cable guide. Install the aluminum cable stop in the top of the downtube with the cutaway area oriented so that it mates with the corresponding cutaway on the top downtube end fitting. Install the top and bottom end fittings, attach the cable clevis fitting to the VG lever tang, and install the downtube on the glider.

CAR TOP MOUNTING AND TRANSPORT

Improper or careless transport of your glider can cause significant damage. You should transport your glider on a rack which has at least three support points which span at least 13' of the length of the glider. These should be well padded and at least four inches wide to distribute the load. Your glider should be mounted on your rack with the control bar facing up. It should be securely tied down with webbing straps which are at least 1/2" wide, but not tied so tightly or with such a small diameter rope that the mylar insert is permanently deformed. If you drive on rough roads where the glider receives impact loads, you should take extra care to pad your glider internally when you pack it up. One special area to pay attention to is the crossbar center section, where it bears against the top of the leading edge tubes. Some extra padding inserted in this area will save wear on your airframe and sail.

IN CLOSING

With proper care and maintenance, your glider will retain a high level of airworthiness for some years. Because of the relatively short history of hang gliding, and the rapid advances in new designs, we do not have a lot of information about the ultimate service life of a hang glider. We do know that ultraviolet (UV) damage to the sail from sunlight is probably the limiting factor in the life of your sail. Try to avoid exposing your sail to sunlight any time you are not actually flying it.

We also know that there are forces in nature which can be so violent that they can result in fatal accidents regardless of the airworthiness of your aircraft. Ultimately your safety is your responsibility. Know the limitations of your knowledge, skill and experience, and know the limitations of your aircraft. Fly within those limitations.

Have fun.

See you in the sky!

Wills Wing, Inc.

HGMA COMPLIANCE VERIFICATION SPECIFICATION SHEET

GLIDER MODEL HP AT 158
MANUFACTURED BY Wills Wing, Inc.

All dimensions in inches; weights are in pounds.

NOTE: These specifications are intended only as a guideline for determining whether a given glider is a certified model and whether it is in the certified configuration. Be aware, however, that no set of specifications, however detailed, can guarantee the ability to determine whether a glider is the same model, or is in the same configuration as was certified, or has those performance, stability, and structural characteristics required by the certification standards. An owner's manual is required to be delivered with each HGMA certified glider, and it is required that it contain additional airworthiness information.

- 1) Weight of glider with all essential parts and without coverbags and non-essential parts: 69
- 2) Leading Edge Dimensions
 - a) Nose plate anchor hole to:
 - 1) Crossbar attachment hole 131
 - 2) Rear sail attachment point 227 - 228
 - b) Outside diameter at:
 - 1) Nose 2.36
 - 2) Crossbar 2.44
 - 3) Rear sail attachment point 2.05
- 3) Crossbar Dimensions
 - a) Overall pin to pin length from the leading edge attachment point to hinge bolt at glider centerline 122.75
 - b) Largest outside diameter 2.44
- 4) Keel dimensions; least and greatest allowable distances, whether variable through tuning or through in-flight variable geometry, from the line joining the leading edge nose bolts to:
 - a) The xbar center load bearing pin 34.375-37.375 (+ / - .375)
 - b) The pilot hang loop 53.75 - 55.625
- 5) Sail Dimensions
 - a) Chord lengths at
 - 1) 3 ft outboard of center line 68
 - 2) 3 ft inboard of tip 41
 - b) Span (extreme tip to tip) 413 (excluding wing tip fairings)
- 6) Location of Information Placard Keel
Location of Test Fly Sticker On information placard
- 7) Recommended Pilot Weight Range 150 - 250 (Hook In)
- 8) Recommended Pilot Proficiency USHGA ADVANCED





HGMA COMPLIANCE VERIFICATION SPECIFICATION SHEET


GLIDER MODEL HP AT 145
MANUFACTURED BY Wills Wing, Inc.

All dimensions in inches; weights are in pounds.

NOTE: These specifications are intended only as a guideline for determining whether a given glider is a certified model and whether it is in the certified configuration. Be aware, however, that no set of specifications, however detailed, can guarantee the ability to determine whether a glider is the same model, or is in the same configuration as was certified, or has those performance, stability, and structural characteristics required by the certification standards. An owner's manual is required to be delivered with each HGMA certified glider, and it is required that it contain additional airworthiness information.

- 1) Weight of glider with all essential parts and without coverbags and non-essential parts: 65
- 2) Leading Edge Dimensions
 - a) Nose plate anchor hole to:
 - 1) Crossbar attachment hole 122
 - 2) Rear sail attachment point 218 - 219
 - b) Outside diameter at:
 - 1) Nose 2.36
 - 2) Crossbar 2.44
 - 3) Rear sail attachment point 2.05
- 3) Crossbar Dimensions
 - a) Overall pin to pin length from the leading edge attachment point to hinge bolt at glider centerline 114
 - b) Largest outside diameter 2.44
- 4) Keel dimensions; least and greatest allowable distances, whether variable through tuning or through in-flight variable geometry, from the line joining the leading edge nose bolts to:
 - a) The xbar center load bearing pin 36.25 - 39.25 (+ / - .375)
 - b) The pilot hang loop 51.375 - 53.25
- 5) Sail Dimensions
 - a) Chord lengths at
 - 1) 3 ft outboard of center line 66
 - 2) 3 ft inboard of tip 41
 - b) Span (extreme tip to tip) 396 (excluding wing tip fairings)
- 6) Location of Information Placard Keel
Location of Test Fly Sticker On information placard
- 7) Recommended Pilot Weight Range 135 - 235 (Hook In)
- 8) Recommended Pilot Proficiency USHGA ADVANCED

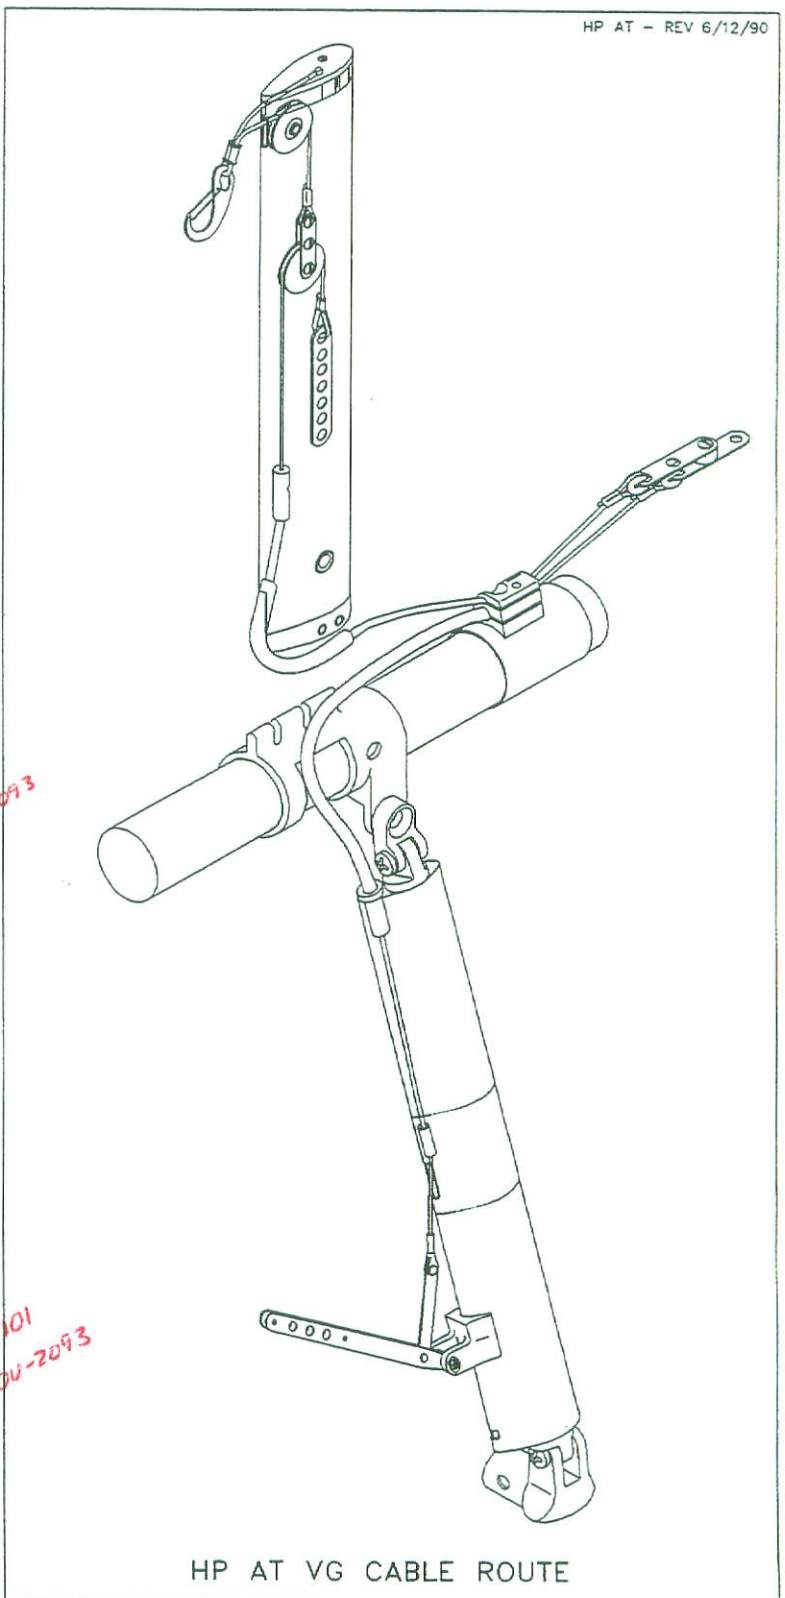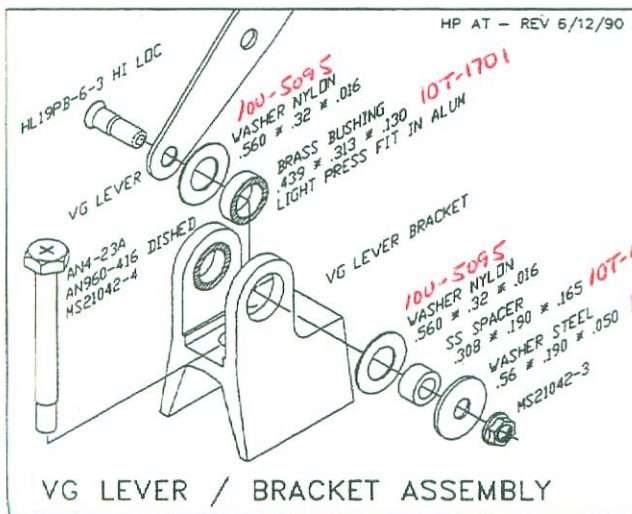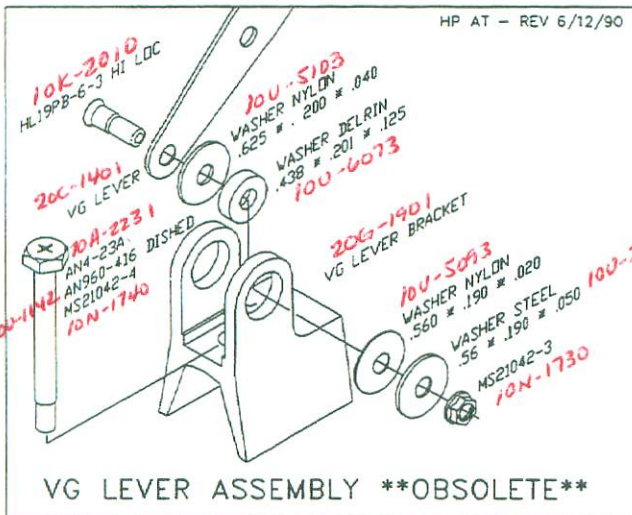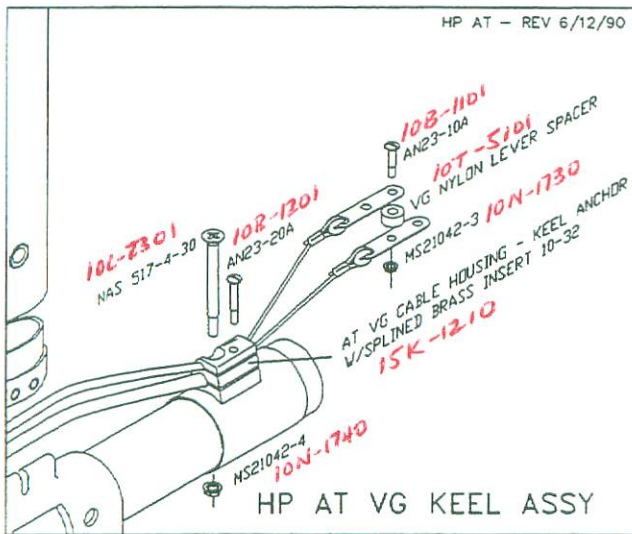

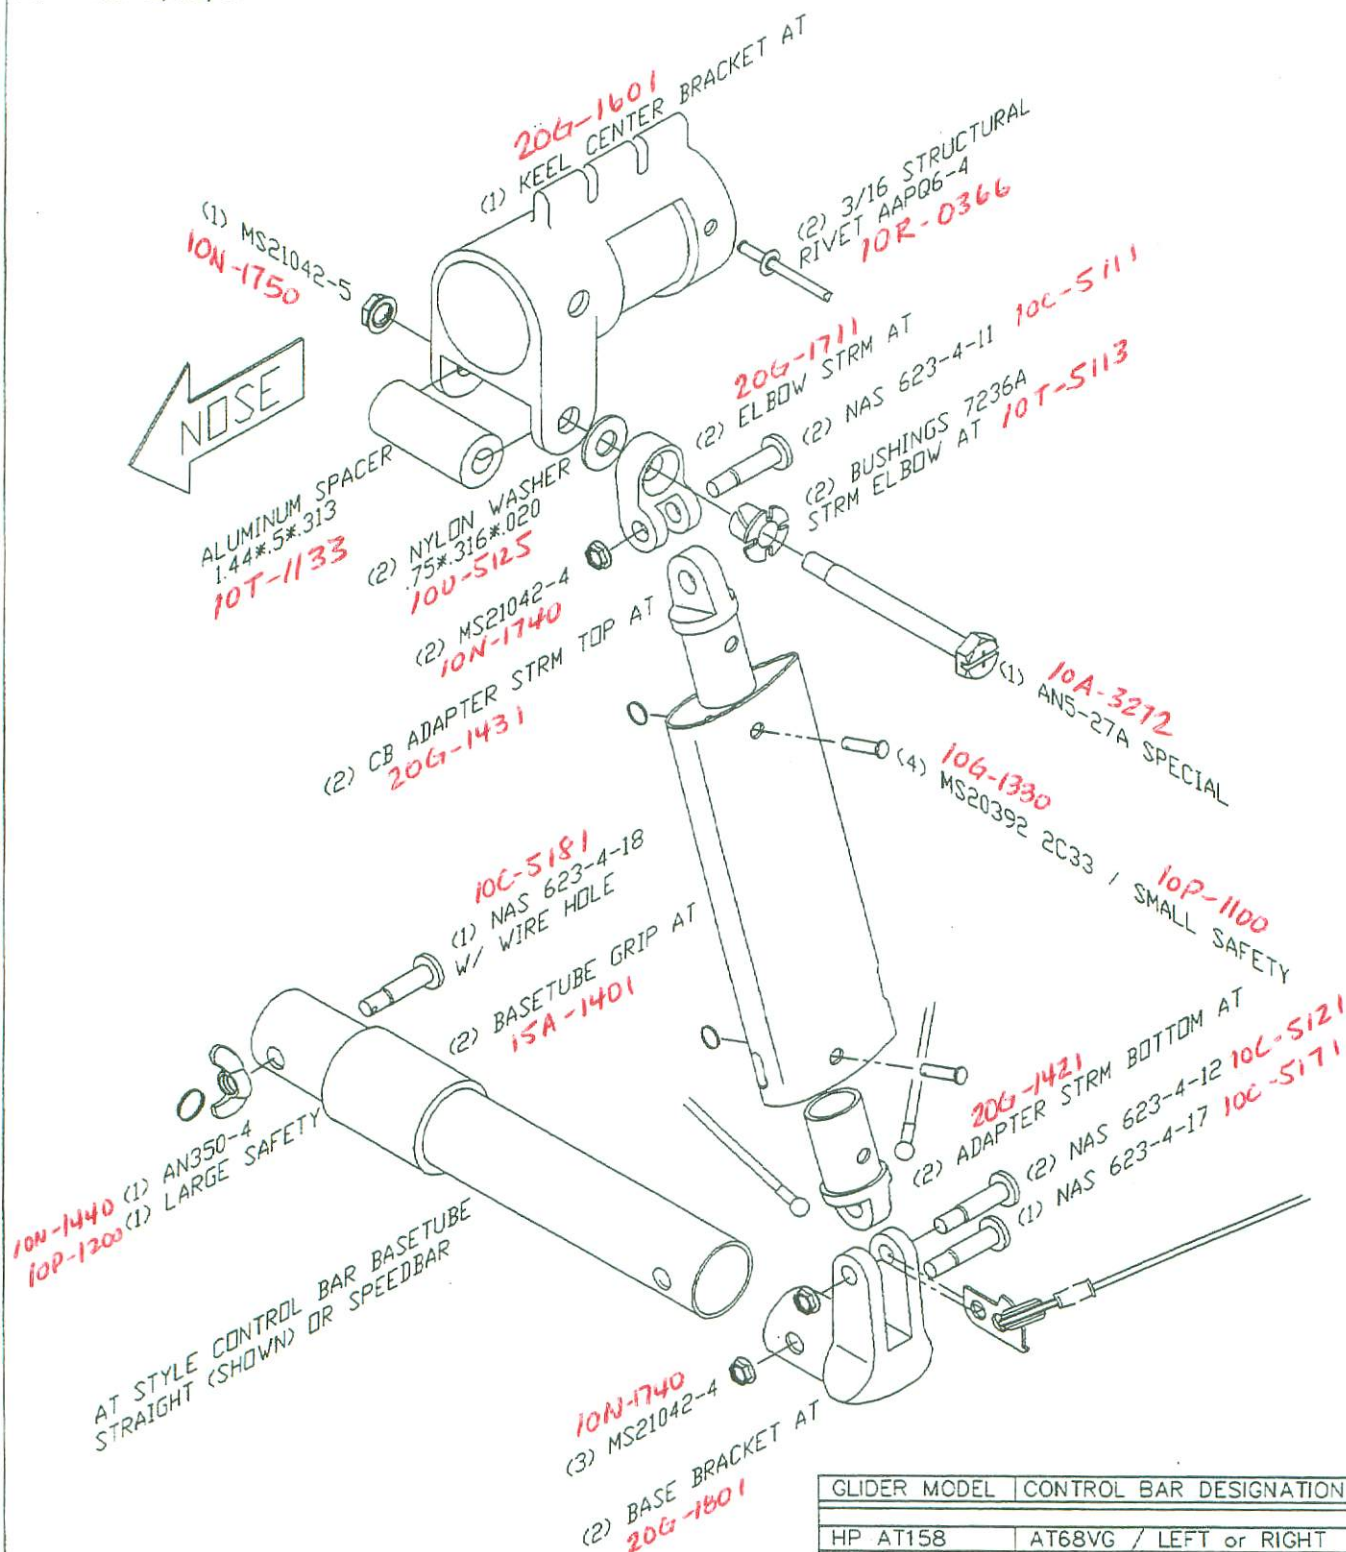

AT STREAMLINE CONTROL BAR ASSEMBLY

GLIDER MODEL	CONTROL BAR DESIGNATION
HP AT158	AT68VG / LEFT or RIGHT
HP AT145	AT65VG / LEFT or RIGHT
SPECTRUM 165	AT65 / ROUND or STREAMLINE
SPECTRUM 144	AT62 / ROUND OR STREAMLINE
SPORT AT180	AT68 / ROUND or STREAMLINE
SPORT AT167	AT65 / ROUND or STREAMLINE
SPORT AT150	AT65 or AT62 / RND or STRMLN

ISA-1314
12TOUTA

ISA-1314
12TOUTA

16N-1240
(2) AN364-4

AN310-4

AND
10th M-125 ps
PHIL
PAN (28)

20C-1732

NOSE


(2) ~~100-5240~~ NYLON WASHERS Ø1.5•.020

10P-1100
SMALL SAFETY


MS20392 2C75
106-1730

AN24-52
103-2520


HP AT CROSSBAR - LEADING EDGE ASSEMBLY

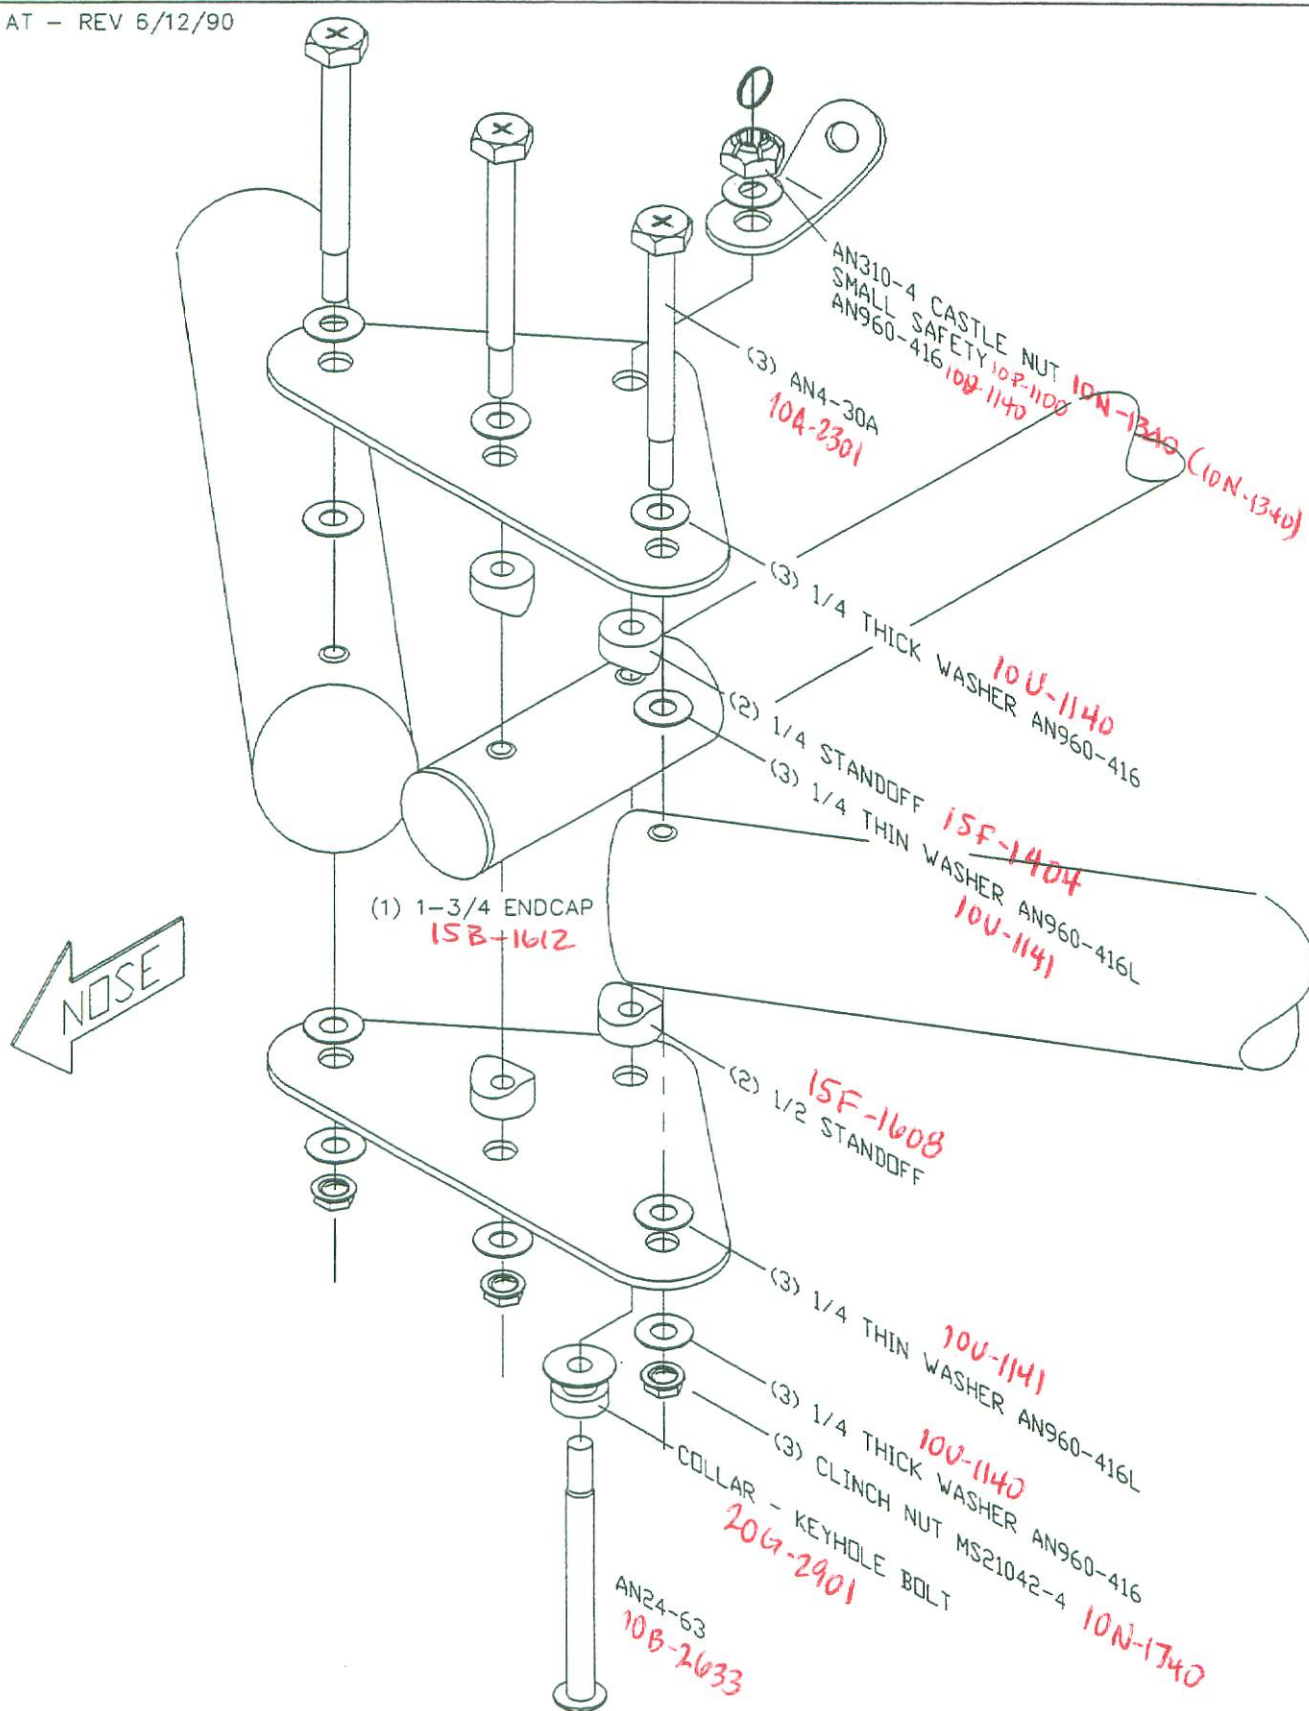

HP AT NOSEPLATE ASSEMBLY

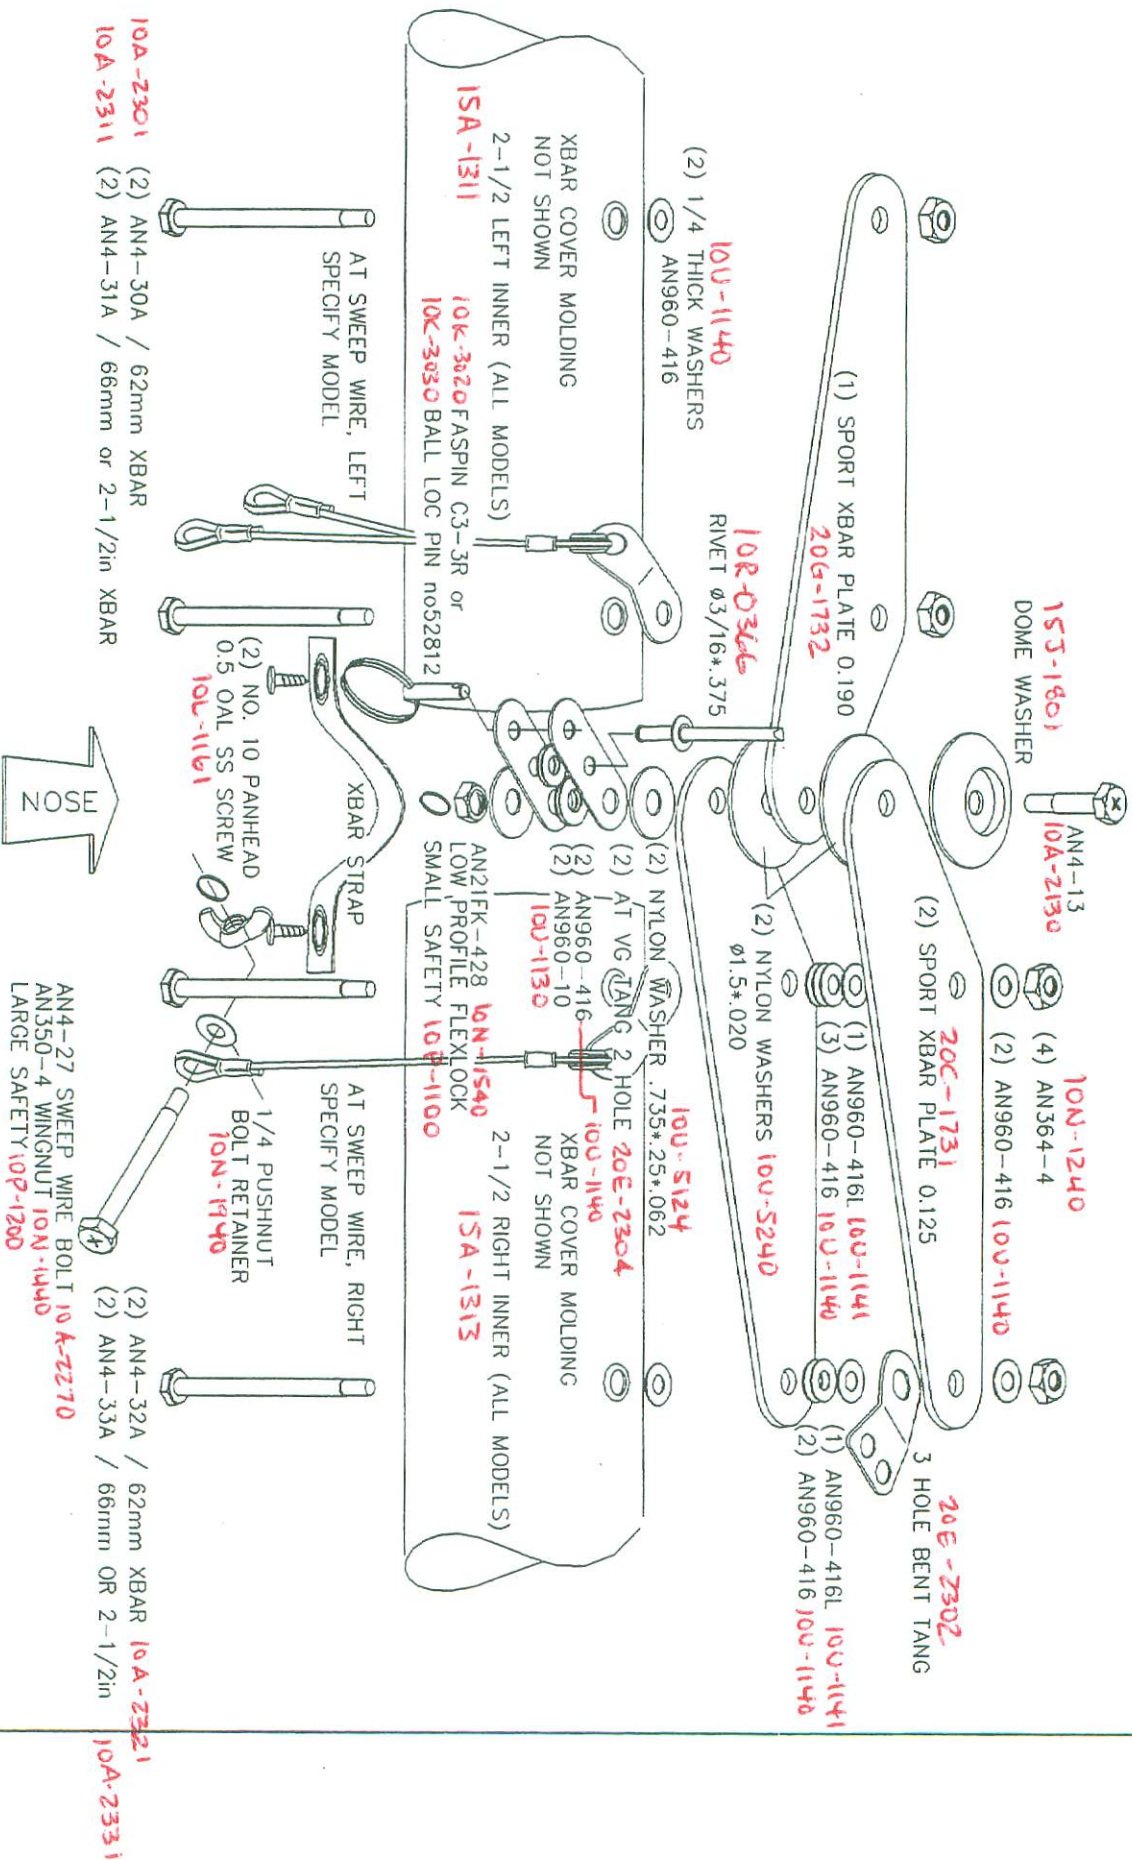



HP AT CROSSBAR CENTER ASSEMBLY

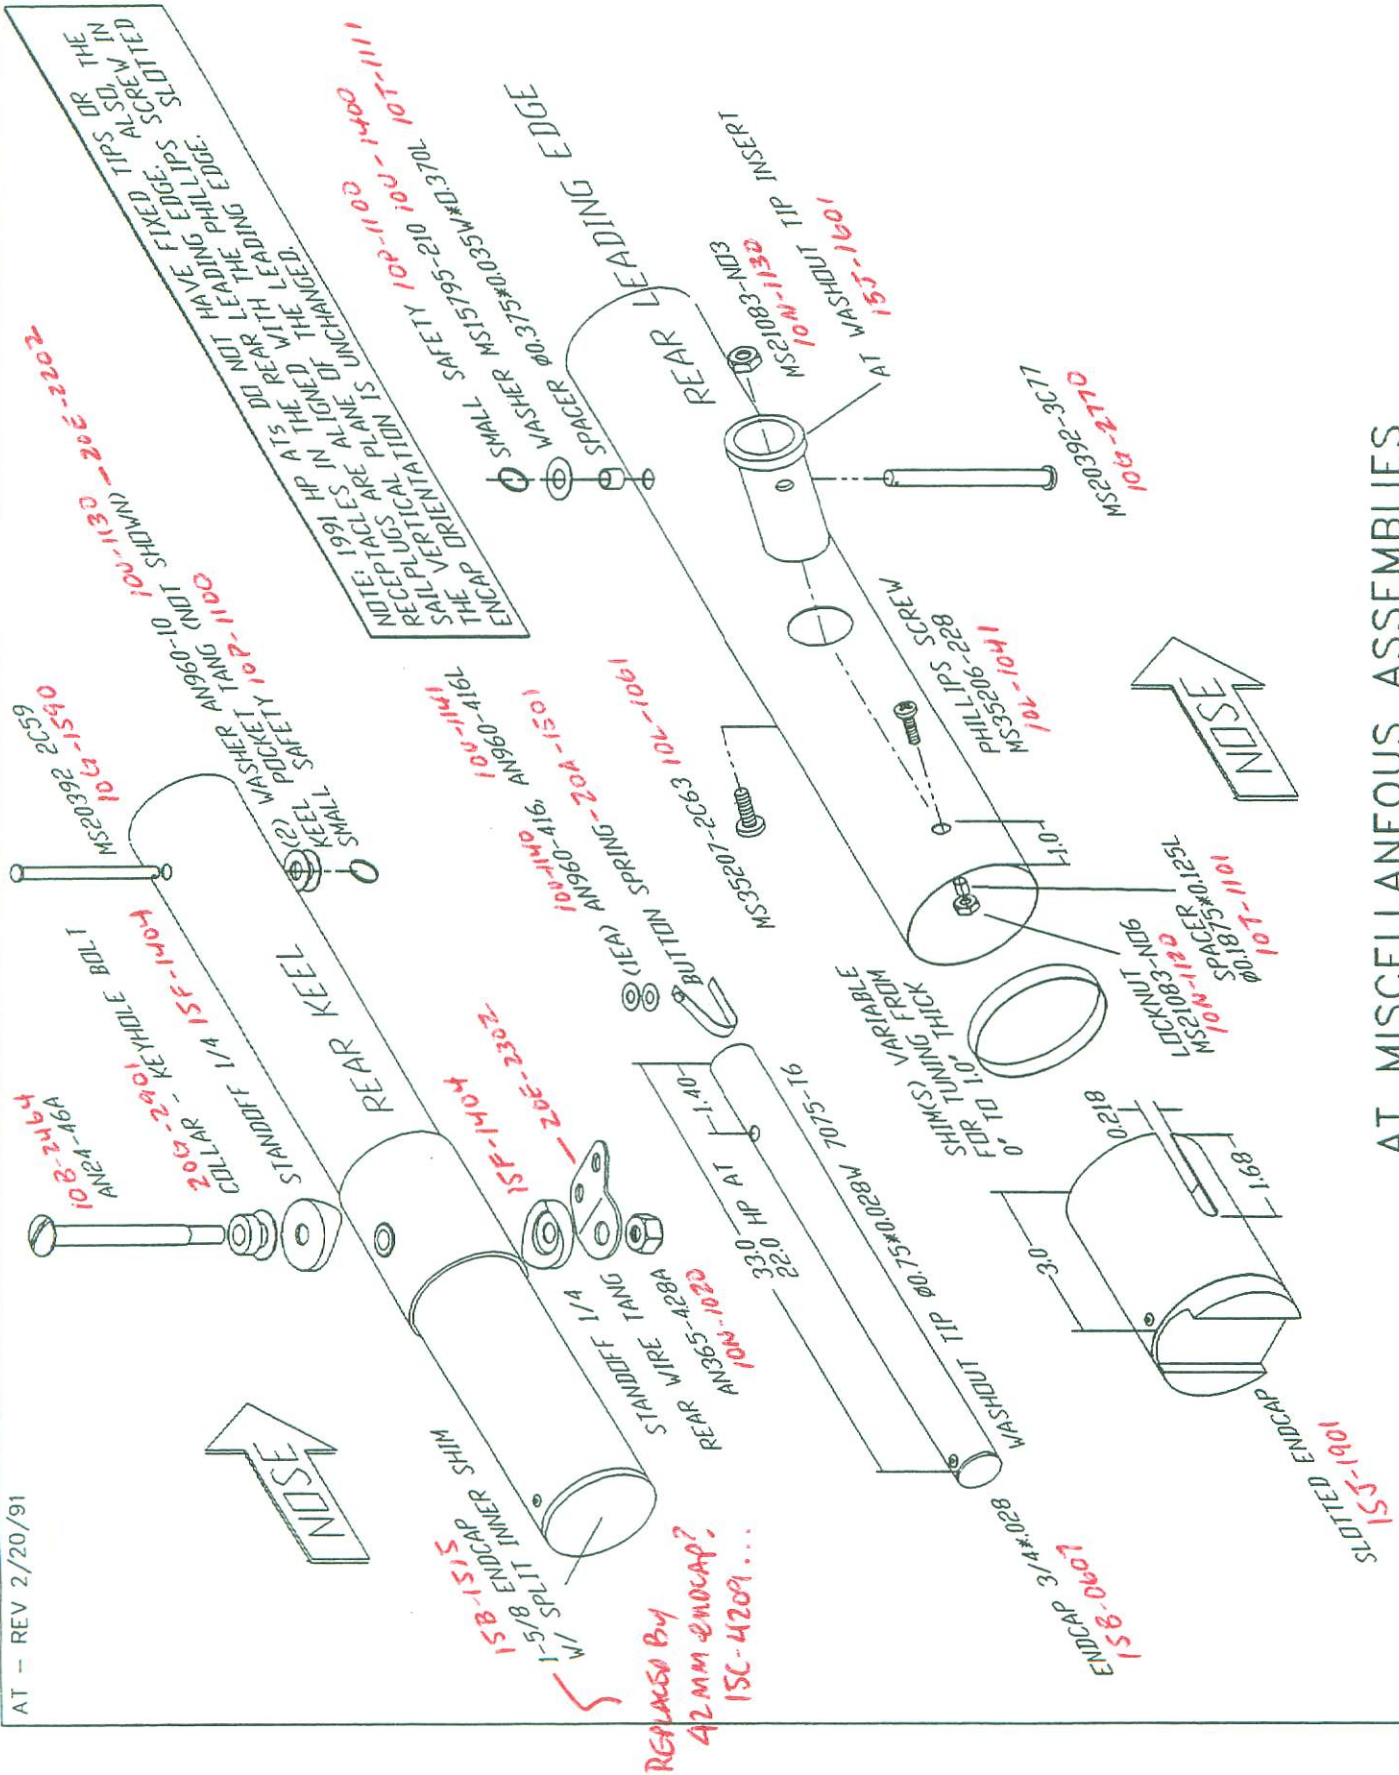

AT MISCELLANEOUS ASSEMBLIES





PART NAME	SIZE	APPLICATION	QTY	MATERIAL SPEC	INTERLIEVE SPEC
ROUND BASETUBE	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
	A165	A1150/A167/A165/A1145	523	SD 6061-16 11250D=06.51	NA
	A168	A1180/A1158	560	SD 6061-16 11250D=06.51	NA
	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
SPEEDBAR	A165	A1150/A167/A1165/A1145	523	SD 6061-16 11250D=06.51	NA
	A168	A1180/A1158	560	SD 6061-16 11250D=06.51	NA
	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
	A165	A1150/A167/A1165/A1145	523	SD 6061-16 11250D=06.51	NA
ROUND LEG	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
	A165	A1150/A167/A1165/A1145	523	SD 6061-16 11250D=06.51	NA
	A168	A1180/A1158	560	SD 6061-16 11250D=06.51	NA
	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
STREAMLINE LEG	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
	A165	A1150/A167/A1165/A1145	523	SD 6061-16 11250D=06.51	NA
	A168	A1180/A1158	560	SD 6061-16 11250D=06.51	NA
	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
UG LEG SPECIFY LT OR RT	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA
	A165	A1150/A167/A1165/A1145	523	SD 6061-16 11250D=06.51	NA
	A168	A1180/A1158	560	SD 6061-16 11250D=06.51	NA
	A162	A1144/A1150	510	SD 6061-16 11250D=06.51	NA

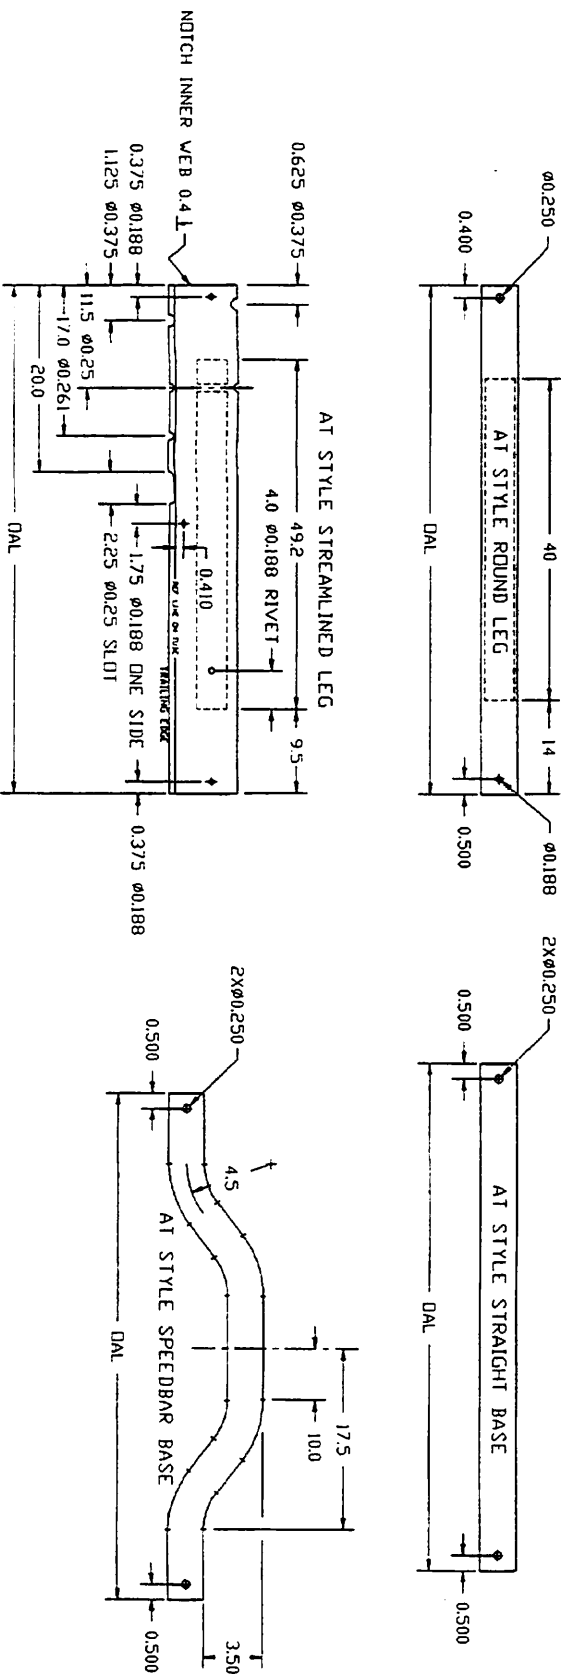

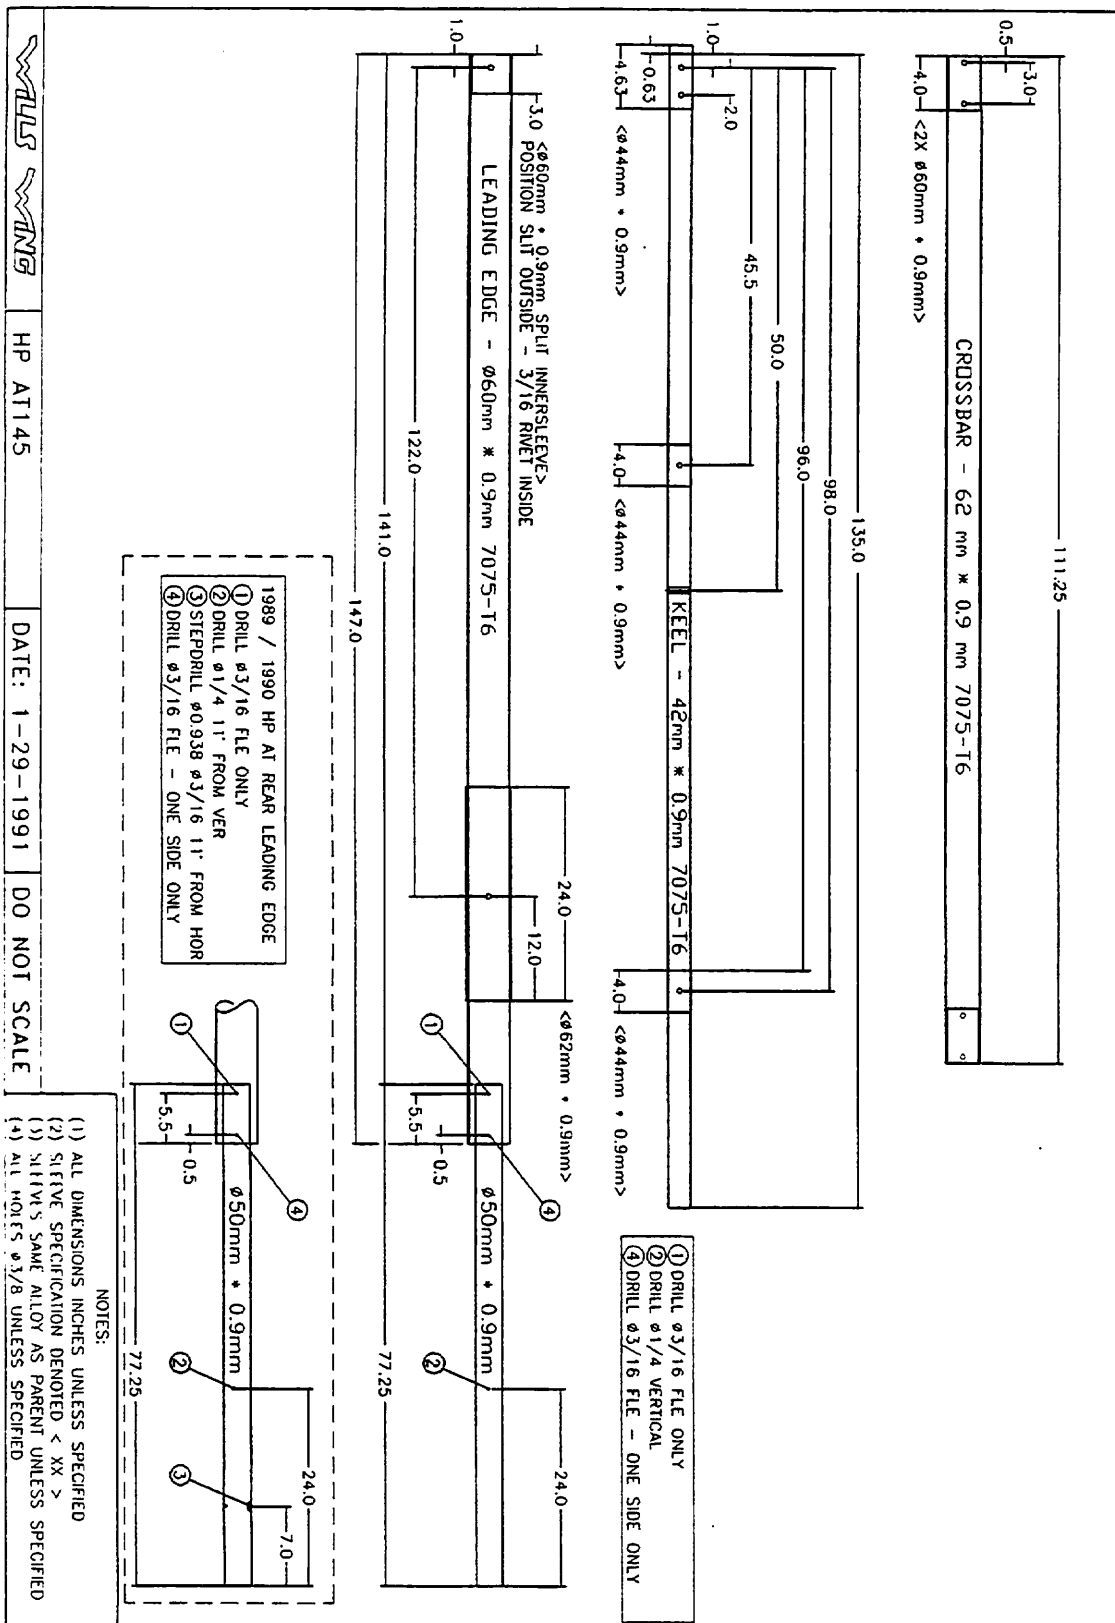

PLEASE INCLUDE GLIDER SERIAL NUMBER WITH EACH PARTS ORDER

DIFFERENT CONFIGURATIONS OF THE HP AT FRAME ARE NOT ALWAYS INTERCHANGABLE

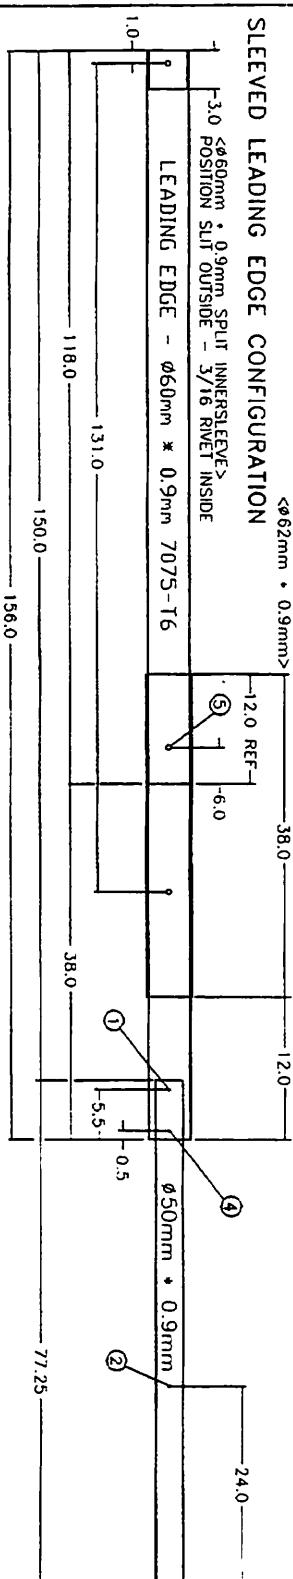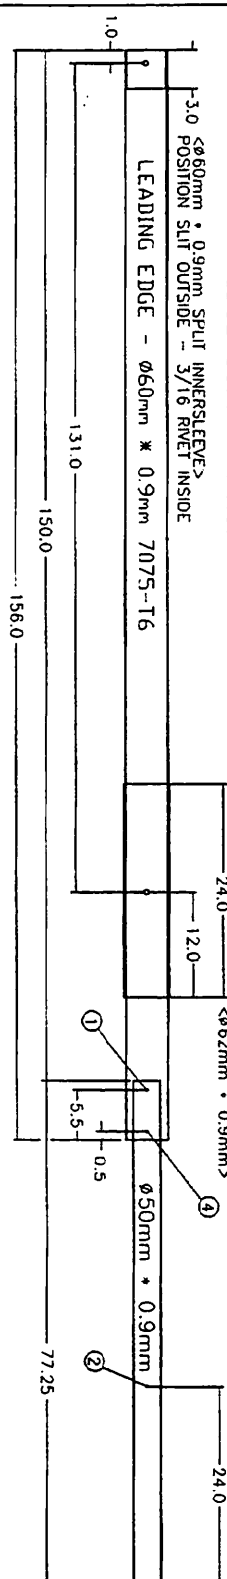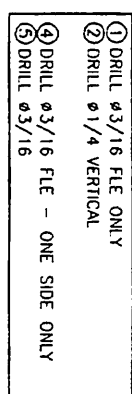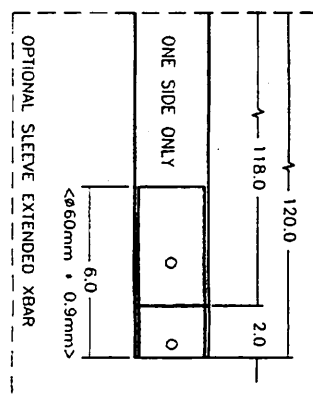

-
- Technical drawing of a mechanical part, likely a shaft or pipe, showing dimensions and labels. The drawing includes a cross-section at the top with a diameter of 50mm and a tolerance of +0.9mm. Dimensions include 5.5, 0.5, 7.0, 7.25, and 24.0. Labels 1, 2, and 3 point to specific features.

PLEASE INCLUDE GLIDER SERIAL NUMBER WITH EACH PARTS ORDER
DIFFERENT CONFIGURATIONS OF THE HP AT FRAME ARE NOT ALWAYS INTERCHANGABLE